



Passenger and Light Truck Tires Catalogue 2018

HP / UHP / SUV / LT / WINTER TIRE / RUN-FLAT

www.gruposailun.com

WITH YOU THROUGH EVERY TURN



New Product
ATREZZO ZSR SUV

Who Are We



World Renowned Manufacturer

From humble beginnings as a manufacturing testing platform to becoming the 18th largest manufacturer in the world in less than just over 10 years, Sailun pushes the limit of tire production research and development to ensure we stay customers centric. Our goal is always to provide customers and end users with the best value tire products and services. Therefore, we have established local distribution and sales support staff in key areas and ensured we partner with quality distributors who fall in line with the Sailun Tire vision.



Research & Development

The roots of Sailun dig deep and have close connections with one of the premiere schools focusing on rubber and tire technology – Qingdao School of Science and Technology. The cooperation between the school and Sailun continues to this day and together we are defining what it means to be a quality tire manufacturer. Sailun stays committed to this level of development by consistently investing 30% of our total revenue into our R&D programs.

Global Sales and Service Network ▼

We are dedicated to working with our partners closely. This is the driving force that pushed us to establish local workforces in key markets who provide localized services, products, and support. This strong relationship ensures that customers are receiving the best quality-value products possible.

Our Passion

Our passion is our customers - we push our own capabilities every day to ensure you receive the best quality products and services to boost your business.

Our Vision

We look to create a product for end-users worldwide that provide comparable quality and safety, but at a value price.



History

2002

On November, Qingdao Sailun Tire Co., LTD. was established.

2003

In April, the Sailun Industrial Park was completed.

2004

In September, the company obtained the DOT product certification from the transportation authority in the United States of America.

2006

In November, the first all steel OTR tire product was successfully produced.

2007

July, PCR tire factory is put into use.

Company is renamed to "Sailun Tire Co., LTD."

2008

In August, the company began renovations on the tire demonstration production line. This major technical project started with the support of the National Development and Reform Commission of China.

2009

In April, the company was awarded the honor of being named the tire technology research demonstration base of China.

September, the first Giant OTR tire finishes production.

2011

Sailun becomes the first private tire manufacturer to be listed on the Shanghai Stock Exchange.

2012

April, Sailun Vietnam factory starts construction.

In June, the research and development center was put into use.

Sailun obtains majority stake in Shenyang Peace Dove Tire Co., LTD.

2013

In June, the Sailun Vietnam factory was successfully put into production, and the new OTR product size of 40.00R57 was approved.

2014

In January, the company acquired a 100% stake in KRT Group.

In April, Sailun acquired a 52% stake in Goma Group.

Jinyu Industrial and Sailun Tire merged to form "Sailun Jinyu Group Co., LTD".

2015

July, Sailun Jinyu Group and Zhengzhou Nissan enter their first race together at the Taklimakan International Rally.

2016

In August, the world's largest sized OTR tire (63-inches) successfully rolls off the line.



SAILUN + JINYU



SAILUN-PTPA FOUNDATION



Sailun Tire was tested in North America by parents from the Parent Tested Parent Approved (PTPA) foundation and has numerous products approved for safety on the road. Check out our list of approved products here:

<http://ptpa.com/winners/>

SAILUN-WCC PARTNERSHIP

Sailun Tire is proud to announce their new partnership with the World Child Cancer Charity (WCC), an organization dedicated to the treatment of children with cancer in developing countries.

The inequality of diagnosing and treating children diagnosed with cancer between high and middle/low income countries is astounding. 200,000 children develop cancer worldwide each year with 80% of those children being located in low or middle income countries with only a 5% survival rate, compared to the 80% in high income countries. These low survival rates are attributed to shortage of specifically trained doctors and nurses, poor diagnosis and mistaken belief that child cancer is too difficult to cure. The work that WCC does is to treat children with cancer in the areas where treatments are not easily available or affordable.



WCC's mission is to bring greater awareness to cancer, cancer diagnosis, treatment and palliative care. Their vision is to raise survival rates to between 50-60% by treating children with relatively simple protocols and inexpensive drugs. Projects such as Malawi, started in 2009, are already seeing such progress. They fund international twinning partnerships which link experienced pediatric oncologists, nurses and healthcare workers from world renowned child cancer units in developed countries to projects in South America, Cameroon, Malawi, Ghana, Bangladesh, Philippines and Myanmar.

In 2014 alone, WCC trained 850 healthcare workers, funded nine projects in 16 different countries and set up a new project, Wilms' Tumour Collaboration across six African countries. They also opened a new project in Myanmar after a successful partnership with the Financial Times and received their first government funding projects in Ghana and Bangladesh.

"We are small but ambitious and, with Sailun's help, we will be able to achieve our plans for 2015 and beyond. These plans include extending our project in the Philippines by creating more satellite centers; expanding our newest project in Myanmar; and continuing to work with the Department of International Development to invest further in our Ghana and Bangladesh projects.

We are extremely grateful for this support from Sailun and its network, and look forward to working with you this year to improve the chances of survival for children with cancer in the developing world."



<http://www.worldchildcancer.org>

Why Choose Sailun?

Are you a distributor looking to add greater value to your line-up? Look no further than the quality engineered Sailun products to help benefit your brand line-up.

Because



Category Leader

Sailun is the
18th
largest tire manufacturer in the world.



Full Product Line

It is Sailun's main focus to develop products that are customer-lead and market oriented, which ensures they meet customer requirements. Through this process we have developed a full line of quality PLT, TBR, and OTR tire products that have been proven to perform in any conditions.



Quality Manufacturing

Quality Assurance and Quality Control are required when developing a product built to keep people safe. That is why Sailun only uses equipment from industry leading suppliers and a self-developed manufacturing process control system to ensure product quality.



Great Brand Value

Value doesn't stop at the quality of our products, it is also ingrained throughout the tire life cycle. Our missions is to generate the greatest value possible to all stakeholders at every stage of the process, and this ethos is incorporated into R&D, production, logistics, sales, and marketing.



Research & Development

This is where Sailun products are born. Our 30% annual investment of revenue is geared towards improving our testing capabilities, equipment, and empowering our engineering teams in Europe, North America, and Vietnam.



Excellence in Channel Support

"Think Global, Act Local": Sailun maintains dedicated support centers around the world staffed with tire industry professionals to help service customers locally.

ABBREVIATIONS

P.R. = PLY RATING

L.I. / S.R. = LOAD INDEX / SPEED RATING

O.D. = OVERALL DIAMETER (MM)

S.W. = SECTION WIDTH (MM)

T.D. = TREAD DEPTH (MM)

R.W. = RIM WIDTH (IN)

Speed Rating	Speed km/h	Speed Rating	Speed km/h
A1	5	K	110
A2	10	L	120
A3	15	M	130
A4	20	N	140
A5	25	P	150
A6	30	Q	160
A7	35	R	170
A8	40	S	180
B	50	T	190
C	60	H	210
E	70	V	240
F	80	W	270
G	90	Y	300
J	100		

CONTENTS

ATREZZO ECO	08
ATREZZO ELITE	10
ATREZZO 4 SEASONS	14
ATREZZO SH406	16
ATREZZO TOURING LS	20
ATREZZO TOURING WR	22

ATREZZO R01 SPORT	24
ATREZZO ZSR	26
ATREZZO ZSR SUV	30
ATREZZO SVR LX	32
ATREZZO SVA1	34

TERRAMAX M/T	36
TERRAMAX HLT	38
TERRAMAX A/T	40
TERRAMAX AT-M	44
TERRAMAX AT4S	46
TERRAMAX CVR	48

COMMERCIO VX1	50
COMMERCIO VX+	52
SL12	54
EXTMILE SL15	56
EXTMILE SL16	57

ENDURE WSL1	58
ICEBLAZER WSL2	60
ICEBLAZER ALPINE	62
ICEBLAZER WST1	64
ICEBLAZER WST2 LT	68
ICEBLAZER WST3	70
WINTERPRO SW61	74

ATREZZO RUN-FLAT	76
ECO-HAULER ST	77



HIGH PERFORMANCE TIRE

ATREZZO ECO

PERFORMANCE RATINGS:

Wet Performance: 8

Dry Performance: 8


Ride Comfort: 9

Quietness: 8

Tread Life: 8



Three wide main grooves and small lateral grooves that run through the sidewall effectively enhance wet grip and improve hydroplaning resistance.



► Adjusted the internal structure of the tire to optimize the distribution of contact stress which improves comfort and lowers rolling resistance.



Added a lightning pattern in the tread for greater aesthetics.



Two center ribs and reinforced grooves help improve tire rigidity for excellent handling. Effectively reduces rolling resistance and improves fuel economy.



Solid large block shoulder design provides exceptional grip to ensure vehicle stability.

ATREZZO ECO




	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
13	155/65R13	73T	532	157	7.4	4 1/2B	360/A/A
	165/65R13	77T	544	170	7.4	5B	360/A/A
	175/65R13	80T	558	177	7.4	5B	360/A/A
	155/70R13	75T	548	157	7.4	4 1/2B	360/A/A
	165/70R13	79T	562	170	7.4	5B	360/A/A
	175/70R13	82T	576	177	7.4	5B	360/A/A
	185/70R13	86T	590	189	7.4	5 1/2B	360/A/A
	155/80R13	79T	578	157	7.4	4 1/2B	360/A/A
	165/80R13	83T	594	165	7.4	4 1/2B	360/A/A
14	165/55R14	72V	538	170	7.4	5J	360/A/A
	165/60R14	75H/T	554	170	7.4	5J	360/A/A
	185/60R14	82H	578	189	7.4	5 1/2J	360/A/A
	155/65R14	75T	558	157	7.4	4 1/2J	360/A/A
	165/65R14	79T	570	170	7.4	5J	360/A/A
	175/65R14	82H/T	584	177	7.4	5J	360/A/A
	175/65R14	86T XL	584	177	7.4	5J	360/A/A
	185/65R14	86H/T	596	189	7.4	5 1/2J	360/A/A
	195/65R14	89H	610	201	7.4	6J	360/A/A
	165/70R14	81T	588	170	7.4	5J	360/A/A
	165/70R14	85T XL	588	170	7.4	5J	360/A/A
	175/70R14	84T	602	177	7.4	5J	360/A/A
	175/70R14	88T XL	602	177	7.4	5J	360/A/A
	185/70R14	88H/T	616	189	7.4	5 1/2J	360/A/A
	195/70R14	91H	630	201	7.4	6J	360/A/A
	175/80R14	88T	636	177	7.4	5J	360/A/A
15	165/50R15	72V	547	170	7.4	5J	360/A/A
	165/55R15	75V	563	170	7.4	5J	360/A/A
	175/55R15	77T	573	182	7.4	5 1/2J	360/A/A
	155/60R15	74T	567	157	7.4	4 1/2J	360/A/A
	175/60R15	81H/V	591	177	7.4	5J	360/A/A
	145/65R15	72T	569	150	7	4 1/2J	360/A/A
	165/65R15	81H/T	595	170	7.4	5J	360/A/A
	165/65R15	81H	595	170	7.4	5J	360/A/A
	175/65R15	84H	609	177	7.4	5J	360/A/A
	175/65R15	88H/T XL	609	177	7.4	5J	360/A/A




ATREZZO ELITE

PERFORMANCE RATINGS:

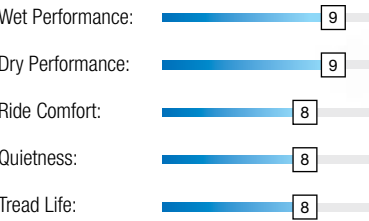

Four wide main grooves and tread sipe design effectively drain water to improve wet grip.



Asymmetric tread design whose inner tread elements help provide efficient drainage, and the outer tread elements offer exceptional handling to obtain optimal driving performance.



A strip within the outer groove not only makes the outer block more robust, but also improves the handling performance. The design adds a special and attractive look to the tire.



Simple staggered layer groove design makes the pattern more dynamic.



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
14	185/55R14	80H	560	194	7.4	6J	360/A/A
15	195/50R15	82H/V	577	201	7.7	6J	360/A/A
	205/50R15	86V	587	214	7.7	6 1/2J	360/A/A
	185/55R15	82H/V	585	194	7.7	6J	360/A/A
	195/55R15	85H/V	595	201	7.7	6J	360/A/A
	205/55R15	88V	607	214	7.7	6 1/2J	360/A/A
	185/60R15	84H/T	603	189	7.7	5 1/2J	360/A/A
	185/60R15	88H/T XL	603	189	7.7	5 1/2J	360/A/A
	195/60R15	88H/V	615	201	7.7	6J	360/A/A
	205/60R15	91H/V	627	209	7.7	6J	360/A/A
	205/60R15	95H XL	627	209	7.7	6J	360/A/A
	185/65R15	88H/T	621	189	7.7	5 1/2J	360/A/A
	185/65R15	92T XL	621	189	7.7	5 1/2J	360/A/A
	195/65R15	91H/T/V	635	201	7.7	6J	360/A/A
	195/65R15	95H XL	635	201	7.7	6J	360/A/A
	205/65R15	94H/V	647	209	7.7	6J	360/A/A
	205/65R15	99T XL	647	209	7.7	6J	360/A/A
	215/65R15	96H/T	661	221	7.7	6 1/2J	360/A/A
	215/65R15	100H XL	661	221	7.7	6 1/2J	360/A/A



ATREZZO ELITE

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
16	185/50R16	81V	592	194	7.7	6J	360/A/A
	195/50R16	84H/V	602	201	7.7	6J	360/A/A
	195/50R16	88V XL	602	201	7.7	6J	360/A/A
	205/50R16	87V	612	214	7.7	6 1/2J	360/A/A
	225/50R16	96W XL	632	233	7.7	7J	360/A/A
	185/55R16	83H/V	610	194	7.7	6J	360/A/A
	185/55R16	87V XL	610	194	7.7	6J	360/A/A
	195/55R16	87H/V	620	201	7.7	6J	360/A/A
	195/55R16	91V XL	620	201	7.7	6J	360/A/A
	205/55R16	91H/V/W	632	214	7.7	6 1/2J	360/A/A
	205/55R16	94V XL	632	214	7.7	6 1/2J	360/A/A
	215/55R16	97H/W XL	642	226	7.7	7J	360/A/A
	225/55R16	99V XL	654	233	7.7	7J	360/A/A
	195/60R16	89H/V	640	201	7.7	6J	360/A/A
	205/60R16	92H/V	652	209	7.7	6J	360/A/A
	205/60R16	96H/V XL	652	209	7.7	6J	360/A/A
	215/60R16	95H/V	664	221	7.7	6 1/2J	360/A/A
	215/60R16	99H/T/V XL	664	221	7.7	6 1/2J	360/A/A
	225/60R16	98V/W	676	228	7.7	6 1/2J	360/A/A
	225/60R16	102V XL	676	228	7.7	6 1/2J	360/A/A
	235/60R16	100W	688	240	7.7	7J	360/A/A
	195/65R16	92V	660	201	7.7	6J	360/A/A
	215/65R16	98H	686	221	7.7	6 1/2J	360/A/A

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
17	205/55R17	95V XL	658	214	7.7	6.5	360 A A
	235/55R17	99V	690	245	7.7	7.5	360 A A
	225/60R17	99V	702	228	7.7	6.5	360 A A
	235/60R17	102V	714	240	7.7	7.0	360 A A
18	215/55R18	99V XL	693	226	7.7	7.0	360 A A
	225/60R18	104W XL	727	228	7.7	6.5	360 A A



ATREZZO **4** SEASONS



Category	Score
Wet Performance:	8
Dry Performance:	8
Ride Comfort:	8
Quietness:	7
Tread Life:	8
Snow Performance:	8
Ice Performance:	7




The unique 4 season asymmetric pattern is designed for use all year round.

Zigzagged sipe and block design maximize grip in water and snow. The three main grooves quickly and effectively drain water and snow for a safer drive.



- 1** Dry handling performance is enhanced due to the strong square block pattern on the outside.



- 2** Newly introduced 3-Dimensional grooves and sipes ensure optimal performance for the entire life of the tire.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
14	185/60R14	82H	578	189	8.5	5 1/2J
	175/65R14	82T	584	177	8.5	5J
	185/65R14	86T	596	189	8.5	5 1/2J
	165/70R14	81T	588	170	8	5J
15	185/55R15	82H	585	194	8.5	6J
	195/55R15	85H	595	201	8.5	6J
	185/60R15	88H XL	603	189	8.5	5 1/2J
	195/60R15	88H	615	201	8.5	6J
	175/65R15	88H XL	609	177	8.5	5J
	185/65R15	88T	621	189	8.5	5 1/2J
	185/65R15	92H XL	621	189	8.5	5 1/2J
	195/65R15	91H/T	635	201	8.5	6J
	195/65R15	95T XL	635	201	8.5	6J
	16	195/55R16	87V	620	201	8.5
195/55R16		91V XL	620	201	8.5	6J
205/55R16		91H	632	214	8.5	6 1/2J
205/55R16		94V XL	632	214	8.5	6 1/2J
215/55R16		93H	642	226	8.5	7J
215/55R16		97V XL	642	226	8.5	7J
225/55R16		99W XL	654	233	8.5	7J
205/60R16		96V XL	652	209	8.5	6J
215/60R16		99H XL	664	221	8.5	6 1/2J
17		225/45R17	94W XL	634	225	8.5



ALL-SEASON PERFORMANCE TIRE

ATREZZO SH406

PERFORMANCE RATINGS:


Wet Performance:  9

Dry Performance:  9

Ride Comfort:  9

Quietness:  8

Tread Life:  8



Groove design:

Efficient water drainage and superior high speed stability.



Sipe design:

Improve head dispersion. Reduced noise emissions.



Reinforced shoulder:

Greater driving stability.
Improved durability for a longer tread life.





ATREZZO SH406

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
12	145/70R12	69S	509	150	7.4	4.50B	460/A/B
	155/70R12	73T	523	157	7.4	4.50B	460/A/B
	165/70R12	77T	537	170	7.8	5.00B	460/A/B
13	165/60R13	73H	528	170	7.8	5.00B	420/A/A
	155/65R13	73T	532	157	7.4	4.50B	460/A/B
	165/70R13	79T	562	170	7.8	5.00B	460/A/B
	175/70R13	82T	576	177	7.8	5.00B	460/A/B
	185/70R13	86T	590	189	8	5.50B	460/A/B
	155/80R13	79T	578	157	7.4	4.50B	460/A/B
	165/80R13	83T	594	165	7.8	4.50B	460/A/B
	155/55R14	69V	526	162	7.4	5J	420/A/A
	165/55R14	72V	538	170	7.8	5J	420/A/A
14	185/60R14	82H	578	189	8	5 1/2J	420/A/A
	195/60R14	86H	590	201	8	6J	420/A/A
	175/65R14	82H/T	584	177	7.8	5J	420/A/A
	175/65R14	86T XL	584	177	7.8	5J	420/A/A
	185/65R14	86H	596	189	8	5 1/2J	420/A/A
	175/70R14	84T	602	177	7.8	5J	460/A/B
	175/70R14	88T XL	602	177	7.8	5J	460/A/B
	185/70R14	88H/T	616	189	8	5 1/2J	460/A/B
	195/70R14	91H/T	630	201	8	6J	460/A/B
	205/70R14	95T	644	209	8	6J	460/A/B


	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	165/50R15	72V	547	170	7.8	5J	420/A/A
	195/50R15	82H	577	201	8	6J	420/A/A
	165/55R15	75V	563	170	7.8	5J	420/A/A
	185/55R15	82H	585	194	8	6J	420/A/A
	195/55R15	85H/V	595	201	8	6J	420/A/A
	185/60R15	84H	603	189	8	5 1/2J	420/A/A
	195/60R15	88H	615	201	8	6J	420/A/A
	205/60R15	91H	627	209	8	6J	420/A/A
	215/60R15	94H	639	221	8.2	6 1/2J	420/A/A
	175/65R15	84H	609	177	7.8	5J	420/A/A
	185/65R15	88H	621	189	8	5 1/2J	420/A/A
	195/65R15	91H/T	635	201	8	6J	420/A/A
	205/65R15	94H	647	209	8	6J	420/A/A
	205/70R15	96T	669	209	8	6J	460/A/B
	215/70R15	98T	683	221	8.2	6 1/2J	460/A/B
16	195/50R16	84V	602	201	8	6J	420/A/A
	205/50R16	87V	612	214	8	6 1/2J	420/A/A
	225/50R16	92H	632	233	8.2	7J	420/A/A
	195/55R16	87H	620	201	8	6J	420/A/A
	205/55R16	91H/V	632	214	8	6 1/2J	420/A/A
	215/55R16	97H XL	642	226	8.2	7J	420/A/A
	225/55R16	99H XL	654	233	8.2	7J	420/A/A
	205/60R16	92V	652	209	8	6J	420/A/A
	215/60R16	95V	664	221	8.2	6 1/2J	420/A/A
	225/60R16	98H	676	228	8.2	6 1/2J	420/A/A
	205/65R16	95H	672	209	8	6J	420/A/A
	215/65R16	98T	686	221	8.2	6 1/2J	420/A/A
	225/65R16	100T	698	228	8.2	6 1/2J	460/A/B
	235/65R16	103T	712	240	8.2	7J	460/A/B
17	225/45ZR17	94W XL	634	225	8.2	7 1/2J	380/A/A
	225/50R17	94V	658	233	8.2	7J	420/A/A
	215/55R17	94V	668	226	8.2	7J	420/A/A
	225/55R17	97V	680	233	8.2	7J	420/A/A
	215/60R17	96T	690	221	8.2	6 1/2J	460/A/B
	225/60R17	99T	702	228	8.2	6 1/2J	460/A/B
	215/65R17	99T	712	221	8.2	6 1/2J	460/A/B
	225/65R17	102T	724	228	8.2	6 1/2J	460/A/B



ALL-SEASON PERFORMANCE TIRE

ATREZZO TOURING LS

PERFORMANCE RATINGS:

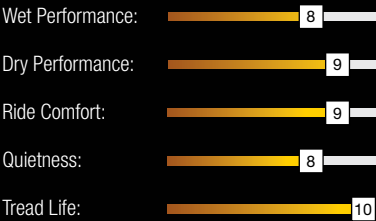

The **TOURING LS** is designed with comfort in mind, and engineered to go the distance. The Touring LS provides exceptional handling in both dry and wet weather conditions, while delivering all-season performance and value.

- All-season compound designed for optimal comfort and grip.
- Special compound formulation for enhanced durability and maximum tread life.



- 1 Siping Angles:**
Reduces noise generated when traveling at high speeds and enhances driving stability.
- 2 Variable pitch design:**
Optimized to ensure a quiet and smooth ride.
- 3 Large contact area:**
Wide, solid footprint for exceptional handling and driver control.




	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
13	175/60R13	77T	540	177	7.8	5.00B	500/A/B
	165/65R13	77T	544	170	7.8	5.00B	640/A/B
	185/70R13	86T	590	189	8	5.50B	640/A/B
14	205/60R14	88H	602	209	8	6J	500/A/A
	185/65R14	86T	596	189	8	5 1/2J	640/A/B
	195/70R14	91T	630	201	8	6J	640/A/B
	185/60R15	84T	603	189	8	5 1/2J	640/A/B
15	195/60R15	88T	615	201	8	6J	640/A/B
	205/60R15	91T	627	209	8.2	6J	640/A/B
	215/60R15	94T	639	221	8.2	6 1/2J	640/A/B
	185/65R15	88T	621	189	8	5 1/2J	640/A/B
	195/65R15	91T	635	201	8	6J	640/A/B
	205/65R15	94T	647	209	8.2	6J	640/A/B
	215/65R15	96T	661	221	8.2	6 1/2J	640/A/B
	205/70R15	96T	669	209	8.2	6J	640/A/B
	215/70R15	98T	683	221	8.2	6 1/2J	640/A/B
	225/70R15	100T	697	228	8.2	6 1/2J	640/A/B
16	205/55R16	91H	632	214	8.2	6 1/2J	540/A/A
	205/60R16	92H	652	209	8.2	6J	540/A/A
	215/60R16	95H/T	664	221	8.2	6 1/2J	640/A/B
	225/60R16	98T	676	228	8.2	6 1/2J	640/A/B
	215/65R16	98T	686	221	8.2	6 1/2J	640/A/B
	235/65R16	103T	712	240	8.2	7J	640/A/B
	225/55R17	97T	680	233	8.2	7J	640/A/B
17	215/60R17	96T	690	221	8.2	6 1/2J	640/A/B
	225/60R17	99T	702	228	8.2	6 1/2J	640/A/B
	235/60R17	102T	714	240	8.2	7 J	640/A/B
	215/65R17	99T	712	221	8.2	6 1/2J	640/A/B
	225/65R17	102T	724	228	8.2	6 1/2J	640/A/B
	245/65R17	107T	750	248	8.2	7J	640/A/B



ALL-SEASON PERFORMANCE TIRE

ATREZZO TOURING WR

PERFORMANCE RATINGS:

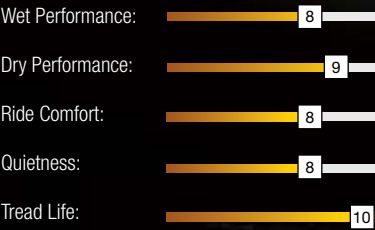

The **TOURING WR** is designed with comfort in mind, and engineered to go the distance. The Touring LS provides exceptional handling in both dry and wet weather conditions, while delivering all-season performance and value.

- All-season compound designed for optimal comfort and road holding capability.
- Special compound formulation for enhanced durability and maximum tread life.



- 1 Large contact area:**
Wide, solid footprint for exceptional handling and driver control.
- 2 Variable pitch design:**
Optimized to ensure a quiet and smooth ride.
- 3 Variable angle siping:**
Reduces road noise at higher speeds and enhances directional stability.


	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
13	185/60R13	80T	552	189	8	5.50B	640/A/B
	165/65R13	77T	544	170	7.8	5.00B	640/A/B
	175/70R13	82T	576	177	7.8	5.00B	500/A/B
	185/70R13	86T	590	189	8	5.50B	640/A/B
	165/80R13	83T	594	165	7.8	4.50B	500/A/B
14	185/65R14	86H	596	189	8	5 1/2J	500/A/A
	185/70R14	88T	616	189	8	5 1/2J	640/A/B
15	205/70R15	96T	669	209	8	7J	640/A/B
	215/70R15	98T	683	221	8.2	6 1/2J	640/A/B
	225/70R15	100T	697	228	8.2	6 1/2J	640/A/B
	215/75R15	100T	703	216	8.2	6J	640/A/B
	225/75R15	102S	719	223	8.2	6J	640/A/B
	235/75R15	105T	733	235	8.2	6 1/2J	640/A/B



ULTRA HIGH PERFORMANCE TIRE

ATREZZO R01 SPORT

PERFORMANCE RATINGS:

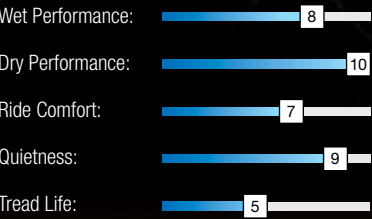

ATREZZO R01 SPORT

- ▶ The normal operating state of the tire has good dry and wet performance to meet normal usage needs. Reaching other higher operating temperatures, the softened tread becomes highly viscous, in turn improving grip performance to meet competition requirements.
- ▶ Specialized tread compounds which are designed to work best in racing conditions.



- 1 Widened tread and wave-like central rib design ensure greater high speed stability.
- 2 Sleek and wide shoulder grooves effectively drain water.
- 3 Big shoulder blocks improve stability and handling to meet performance needs.



High-end product with unique sidewall design; employs curved incisions which fully reflects its sporty and urban look.



Curved grooves improve abrasion resistance and the rounded corners on the tread block edges protects the tire from damage.




Special rubber formulation improves tire strength and grip.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	195/50R15	82V	577	201	7.1	6J	180/AA/A
	195/55R15	89V XL	595	201	7.1	6J	180/AA/A
17	215/45ZR17	91W XL	626	213	7.1	7J	180/AA/A
18	265/35R18	97W XL	643	271	7.9	9 1/2J	180/AA/A
	225/40ZR18	95W XL	637	230	7.1	8J	180/AA/A
	235/40R18	95W XL	645	241	7.1	8 1/2J	180/AA/A
	255/50R18	116V XL	713	265	7.9	8J	180/AA/A
	255/55R18	109V XL	737	265	8.2	8J	180/AA/A




ULTRA HIGH PERFORMANCE TIRE

ATREZZO ZSR

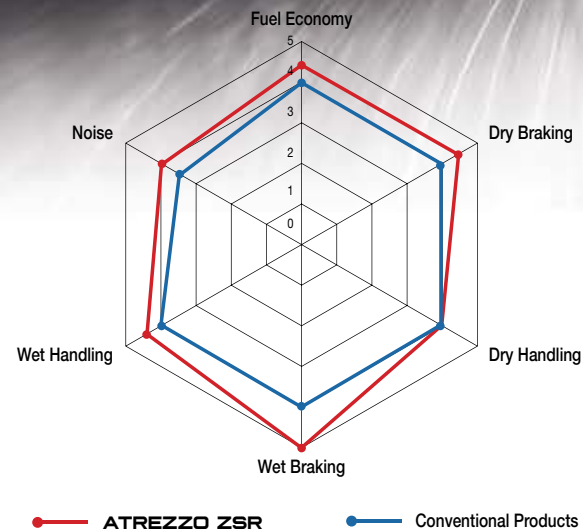

PERFORMANCE RATINGS:

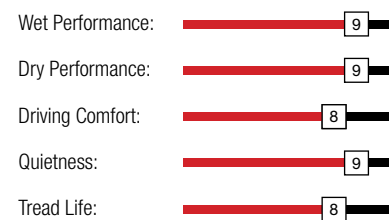


The new generation **ATREZZO ZSR** is engineered to deliver precise wet and dry handling performance. With an asymmetrical tread design and enhanced tread rubber formula, Atrezzo ZSR rises to the challenge and provides exceptional performance on the street and on the highway.

- Asymmetrical tread design for uncompromising performance.
- Wide shoulder blocks and high angle sipes improve high speed performance.
- Variable pitch tread design provides a smooth, quiet ride.
- Advanced tread compound delivers superior cornering and exceptional handling.
- Deep, circumferential grooves and hundreds of biting edges deliver excellent wet and dry traction.


- 1** Special tread compound formula reduces rolling resistance and improves skid resistance.

White Carbon Black Filler




White carbon black sticks better to the body of the tire which creates less friction. This greatly reduces the tire's rolling resistance. White carbon black is more flexible making it better at absorbing shocks from road deformations and improves grip.

Carbon Black Filler



- 2** Main tread rubber material greatly improves hydroplaning resistance to provide you with a safer ride.



High content of Styrene Vinyl which provides great hydroplaning resistance.




Excellent Drainage Performance

Grooves with varying widths efficiently drain water to reduce hydroplaning and improve fuel efficiency.



Noise Emission

The various groove angles evenly distribute vibrations generated while running to reduce noise emissions. The design has been measured to reduce noise emissions by about 3%.

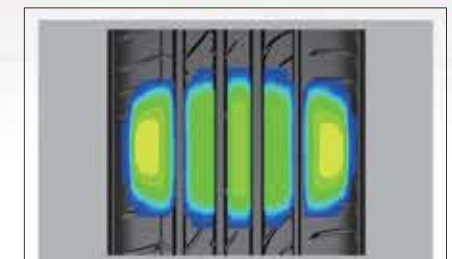

Longer Tread Life

Through our testing, we have ensured greater driving stability and promoted uniform wear by increasing the tire's ground contact area by 6%.

High Speed Stability

The central rib pattern improves high speed stability to improve driving comfort.


Cornering

The reinforced shoulder design improves grip for effective corner capabilities.



ATREZZO ZSR Formula Intro

Rolling Resistance

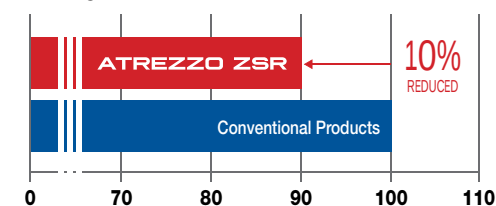

Skid Resistnace





ATREZZO ZSR

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	195/45R15	78V	557	195	8	6 1/2J	340/A/A
16	195/40ZR16	80W XL	562	200	8.2	7J	340/A/A
	195/45R16	84V XL	582	195	8	6 1/2J	340/A/A
	205/45R16	87V/W XL	590	206	8.2	7J	340/A/A
	205/50ZR16	87W	612	214	8.2	6 1/2J	340/A/A
	205/55ZR16	91W	632	214	8.3	6 1/2J	340/A/A
	215/55ZR16	97W XL	642	226	8.2	7J	340/A/A
	225/55ZR16	99W XL	654	233	8.2	7J	340/A/A
17	215/35ZR17	83W XL	582	218	8.2	7 1/2J	340/A/A
	195/40R17	81V XL	588	200	8.2	7J	340/A/A
	205/40ZR17	84W XL	596	212	8.2	7 1/2J	340/A/A
	215/40ZR17	87W XL	604	218	8	7 1/2J	340/A/A
	245/40ZR17	95W XL	628	248	8.2	8 1/2J	340/A/A
	205/45ZR17	88W XL	616	206	8.2	7J	340/A/A
	215/45ZR17	91W XL	626	213	8	7J	340/A/A
	225/45ZR17	94W XL	634	225	8.2	7 1/2J	340/A/A
	235/45ZR17	97W XL	644	236	8.2	8J	340/A/A
	245/45ZR17	99W XL	652	243	8.2	8J	340/A/A
	205/50ZR17	93W XL	638	214	8.2	6 1/2J	340/A/A
	215/50R17	95V XL	648	226	8.2	7J	340/A/A
	215/50ZR17	95W XL	648	226	8.2	7J	340/A/A
	225/50ZR17	98W XL	658	233	8.2	7J	340/A/A
	215/55ZR17	98W XL	668	226	8.2	7J	340/A/A
	225/55R17	101V XL	680	233	8.2	7J	340/A/A
	225/55ZR17	101W XL	680	233	8.2	7J	340/A/A

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
18	215/35ZR18	84W XL	607	218	8	7 1/2J	340/A/A
	225/35ZR18	87W XL	615	230	8.2	8J	340/A/A
	255/35ZR18	94W XL	635	260	8.2	9J	340/A/A
	265/35ZR18	97W XL	643	271	8.2	9 1/2J	340/A/A
	215/40R18	89V XL	629	218	8	7 1/2J	340/A/A
	215/40ZR18	89Y XL	629	218	8	7 1/2J	340/A/A
	225/40ZR18	92W XL	637	230	8.2	8J	340/A/A
	235/40ZR18	95W/Y XL	645	241	8.2	8 1/2J	340/A/A
	245/40ZR18	97W XL	653	248	8.2	8 1/2J	340/A/A
	215/45ZR18	93W/Y XL	651	213	8.2	7J	340/A/A
	225/45ZR18	95W/Y XL	659	225	8.2	7 1/2J	340/A/A
	235/45ZR18	98W XL	669	236	8.2	8J	340/A/A
	245/45ZR18	100W XL	677	243	8.2	8J	340/A/A
	255/45ZR18	103W XL	687	255	8.2	8 1/2J	340/A/A
	225/50ZR18	95W	683	233	8.2	7J	340/A/A
	235/50ZR18	101W/Y XL	693	245	8.2	7 1/2J	340/A/A
19	275/30ZR19	96W/Y XL	649	278	8.2	9 1/2J	340/A/A
	215/35ZR19	85W/Y XL	633	218	8.2	7 1/2J	340/A/A
	225/35ZR19	88W XL	641	230	8.2	8J	340/A/A
	235/35ZR19	91W XL	647	241	8.2	8 1/2J	340/A/A
	245/35ZR19	93W XL	655	248	8.2	8 1/2J	340/A/A
	255/35ZR19	96Y XL	661	260	8.2	9J	340/A/A
	275/35ZR19	96W	675	278	8.2	9 1/2J	340/A/A
	245/40ZR19	98W XL	679	248	8.2	8 1/2J	340/A/A
	235/55ZR19	105W XL	741	245	8	7 1/2J	340/A/A
	235/55ZR19	105W XL	741	245	8	7 1/2J	340/A/A
20	245/30ZR20	90W XL	656	248	8.2	8 1/2J	340/A/A
	275/30ZR20	97W/Y XL	674	278	8.2	9 1/2J	340/A/A
	225/35ZR20	90W/Y XL	666	230	8.2	8J	340/A/A
	245/35ZR20	95W/Y XL	680	248	8.2	8 1/2J	340/A/A
	255/35ZR20	97W/Y XL	686	260	8.2	9J	340/A/A



ULTRA HIGH PERFORMANCE SUV TIRE

ATREZZO ZSR SUV

PERFORMANCE RATINGS:



ATREZZO ZSR SUV

Special Tred Compound

The tread formula effectively improves wet driving capabilities and improve rolling resistance for improved fuel efficiency.



Comfortable Ride

Groove pattern improves driving stability and works with the optimized variable pitch arrangement to reduce noise emissions.

Asymmetric Pattern for Balanced Performance

The asymmetric pattern design boasts two strengths; the inner sidewall is adept at draining water to increase wet performance, and outside sidewall with its large tread blocks improves grip while cornering.

High Speed Performance

Widened tread surface design; when in contact with the ground the specially structured crown evenly distributes force to achieve precise control at high speeds.




	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
18	235/60R18	107V XL	739	240	8	7J	340/A/A
19	235/45ZR19	99Y XL	695	236	7.7	8J	340/A/A
	255/50ZR19	107Y XL	739	265	8	8J	340/A/A
20	275/40ZR20	106Y XL	728	278	7.7	9 1/2J	340/A/A
	255/50ZR20	109W/Y XL	764	265	8	8J	340/A/A
	255/55ZR20	110Y XL	788	265	8	8J	340/A/A
21	295/35ZR21	107Y XL	739	301	7.7	10 1/2J	340/A/A
	275/45ZR21	110Y XL	781	273	7.7	9J	340/A/A
22	275/40ZR22	108Y XL	779	278	7.7	9 1/2J	340/A/A
	295/40ZR22	112Y XL	795	301	7.7	10 1/2J	340/A/A



ULTRA HIGH PERFORMANCE SUV TIRE



ATREZZO SVR LX

PERFORMANCE RATINGS:

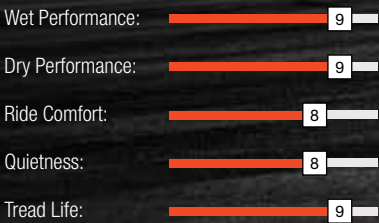

The **ATREZZO SVR LX** is a premium high-performance tire designed for SUV and crossover vehicles. An advanced tread design with a sporty look, the SVR LX accentuates the appearance of your ride, while providing exceptional all-season performance, comfort, and tread life.

- Perfect balance of style, luxury, and all-season performance.
- Available in stylish 20"-24" sizes with M+S ratings for a wide range of OE and plus-size fitments.

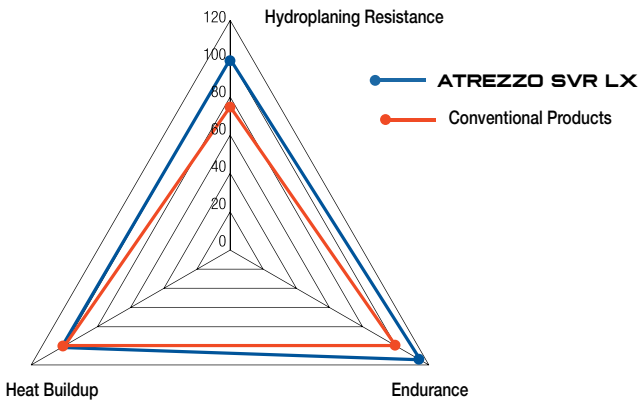

- 1 The tread formula compounds ensure excellent wear resistance for greater fuel economy.
- 2 The specialized formula also substantially increases wet grip.



Groove Design

All grooves are slightly inclined to effectively funnel water out of the tire for improve hydroplaning resistance.



Shoulder Grooves

The variable pitch design on the shoulder grooves and the sipes improve grip and handling for all seasons. They also effectively reduce noise emissions for improved driving comfort.



In 2011, the series was selected by the global automotive media to be awarded the **“SEMA 2011 Best New Product Award.”** They also won the China domestic tire brand award for the first time.



SVR

Directional Tread Pattern

The uniform V-shaped tread pattern design provides excellent grip, handling, and high speed performance in both dry and wet conditions. Efficiently drains water for a safer driving experience.

Sipe Design

The unique sipe design on the shoulder provides better stability on dry and wet roads as well as effectively reduces noise emissions.




	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
20	275/40R20	106W XL	728	278	9.5	9 1/2J	420/A/A
	275/45R20	110V XL	756	273	9.5	9J	420/A/A
	295/45R20	114V XL	774	296	9.5	10J	420/A/A
	265/50R20	111V XL	774	277	9.5	8 1/2J	420/A/A
	285/50R20	116V XL	794	297	9.5	9J	420/A/A
	305/50R20	120V XL	814	316	9.5	9 1/2J	420/A/A
	275/55R20	117V XL	810	284	9.5	8 1/2J	420/A/A
22	275/60R20	119S XL	838	279	9.5	8J	420/A/A
	255/30R22	95V XL	713	260	9.5	9J	420/A/A
	265/35R22	102W XL	745	271	9.5	9 1/2J	420/A/A
	265/40R22	106V XL	771	271	9.5	9 1/2J	420/A/A
	305/40R22	114V XL	803	313	9.5	11J	420/A/A
	305/45R22	118V XL	833	303	9.5	10J	420/A/A
	295/35R24	110V XL	816	301	9.5	10 1/2J	420/A/A
24	305/35R24	112V XL	824	313	9.5	11J	420/A/A
	285/40R24	112V XL	838	290	9.5	10J	420/A/A
	295/40R24	114V XL	846	301	9.5	10 1/2J	420/A/A



ATREZZO SVA1



PERFORMANCE RATINGS:

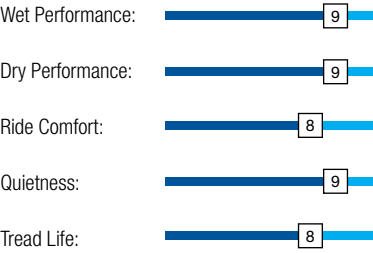

Asymmetrical Tread Pattern:

Provides excellent cornering stability while maintaining superior wet traction.

Groove Design:

Efficiently drains water for safer driving on wet roads.



Shoulder Groove Design:

Wave-like design on the shoulder helps reduce noise emissions and increases cornering capabilities.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	195/45R15	78V	557	195	8	6 1/2J	340/A/A
	195/50R15	82V	577	201	8	6J	340/A/A
	195/55R15	85H/V	595	201	8	6J	340/A/A
16	195/45R16	84V XL	582	195	8	6 1/2J	340/A/A
	205/45R16	87V XL	590	206	8	7J	340/A/A
	205/45ZR16	87W XL	590	206	8	7J	340/A/A
	195/50R16	88V XL	602	201	8	6J	340/A/A
	205/50R16	87V	612	214	8	6 1/2J	340/A/A
	205/55R16	91V/W	632	214	8	6 1/2J	340/A/A
	205/55R16	94V XL	632	214	8	6 1/2J	340/A/A
	215/55ZR16	97W XL	642	226	8.2	7J	340/A/A
17	225/55ZR16	99W XL	654	233	8.2	7J	340/A/A
	195/40R17	81H XL	588	200	8	7J	340/A/A
	195/40ZR17	81W XL	588	200	8	7J	340/A/A
	205/40ZR17	84W XL	596	212	8	7 1/2J	340/A/A

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
17	215/40ZR17	87W XL	604	218	8	7 1/2J	340/A/A
	245/40ZR17	95W XL	628	240	8.2	8 1/2J	340/A/A
	195/45R17	85V XL	608	195	8	6 1/2J	340/A/A
	205/45ZR17	88W XL	616	206	8	7J	340/A/A
	215/45ZR17	91W XL	626	213	8.2	7J	340/A/A
	225/45ZR17	94W XL	634	225	8.2	7 1/2J	340/A/A
	235/45ZR17	97W XL	644	236	8.2	8J	340/A/A
	245/45ZR17	99W XL	652	243	8.2	8J	340/A/A
	205/50ZR17	93W XL	638	214	8	6 1/2J	340/A/A
	215/50R17	95V/W XL	648	226	8.2	7J	340/A/A
	225/50ZR17	98W XL	658	233	8.2	7J	340/A/A
	235/50ZR17	96W	668	240	8.2	7 1/2J	340/A/A
	215/55ZR17	98W XL	668	226	8.2	7J	340/A/A
	225/55R17	101V XL	680	233	8.2	7J	340/A/A
	225/55ZR17	101W XL	680	233	8.2	7J	340/A/A
	235/55R17	103H XL	690	245	8.2	7 1/2J	340/A/A
18	235/55ZR17	103W XL	690	245	8.2	7 1/2J	340/A/A
	215/35ZR18	84W XL	607	218	8	7 1/2J	340/A/A
	255/35ZR18	94W XL	635	260	8.2	9 J	340/A/A
	265/35ZR18	97Y XL	643	271	8.2	9 1/2J	340/A/A
	215/40ZR18	89W XL	629	218	8	7 1/2J	340/A/A
	225/40ZR18	92W XL	637	230	8.2	8J	340/A/A
	235/40ZR18	95W XL	645	241	8.2	8 1/2J	340/A/A
	245/40ZR18	97Y XL	653	248	8.2	8 1/2J	340/A/A
	225/45ZR18	95W XL	659	225	8.2	7 1/2J	340/A/A
	235/45R18	98V XL	669	236	8.2	8J	340/A/A
	245/45ZR18	100W XL	677	243	8.2	8J	340/A/A
	255/45ZR18	103W XL	687	255	8.5	8 1/2J	340/A/A
	235/50ZR18	97W	693	245	8.2	7 1/2J	340/A/A
	245/50ZR18	104Y XL	703	253	8.2	7 1/2J	340/A/A
	225/55R18	98V	705	233	8.2	7J	340/A/A
19	265/30ZR19	93Y XL	643	271	8.2	9 1/2J	340/A/A
	275/30ZR19	96Y XL	649	278	8.2	9 1/2J	340/A/A
	225/35ZR19	88W XL	641	230	8.2	8J	340/A/A
	235/35ZR19	91W XL	647	241	8.2	8 1/2J	340/A/A
	245/35ZR19	93W XL	655	248	8.2	8 1/2J	340/A/A
	255/35ZR19	96W XL	661	260	8.2	9J	340/A/A
	275/35ZR19	96Y	675	278	8.2	9 1/2J	340/A/A
	275/35ZR19	100W XL	675	278	8.2	9 1/2J	340/A/A
	225/40ZR19	93Y XL	663	230	8.2	8J	340/A/A
	245/40ZR19	98Y XL	679	248	8.2	8 1/2J	340/A/A
	255/40R19	100H XL	687	260	8.2	9J	340/A/A
	275/40ZR19	105Y XL	703	278	8.5	9 1/2J	340/A/A
	245/45ZR19	98W	703	240	8.2	8J	340/A/A
	275/45ZR19	108Y XL	731	273	8.5	9J	340/A/A
	255/50R19	107V XL	739	265	8.5	8J	340/A/A
20	225/30ZR20	85Y XL	644	230	8.2	8J	340/A/A
	235/30ZR20	88W XL	650	242	8.2	8 1/2J	340/A/A
	275/30ZR20	97W XL	674	278	8.2	9 1/2J	340/A/A
	225/35ZR20	90W XL	666	230	8.2	8J	340/A/A
	245/35ZR20	95W XL	680	248	8.2	8 1/2J	340/A/A
	255/35ZR20	97W XL	686	260	8.2	9J	340/A/A
	245/40ZR20	99Y XL	704	248	8.2	8 1/2J	340/A/A
	275/40ZR20	106W XL	728	278	8.5	9 1/2J	340/A/A
	245/45ZR20	103W XL	728	243	8.2	8J	340/A/A
	255/45ZR20	105W XL	738	255	8.5	8 1/2J	340/A/A
22	265/50R20	111V/W XL	774	277	8.5	8 1/2J	340/A/A
	245/30ZR22	92W XL	607	248	8.2	8 1/2J	340/A/A




MUD-TERRAIN LIGHT TRUCK & SUV TIRE

TERRAMAX

M/T

PERFORMANCE RATINGS:

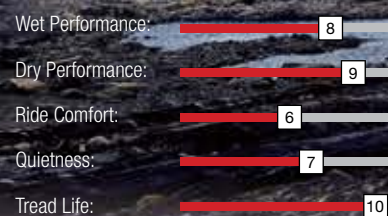

Strong Carcass

The three layer carcass design significantly improves tire strength for better resistance to impacts.



■ Staggered shoulder blocks improve traction and climbing capability.

■ Z-Shaped Grooves

The z-shaped grooves between blocks is designed specifically to enhance off-road driving capabilities by improving grip and climbing ability.

■ Grooves



Deepened grooves allows mud to easily be discharged from the tread at both high and low speeds. The design also offers better grip when traveling on rocky or rugged roads.

■ Shoulder Design

Large blocks on the shoulder vastly enhance handling on muddy and rock roads.

■ Safety

The shield pattern which extends from the sidewall protects the sidewall from abrasions and increase traction on mud roads. The carcass is designed with three layers of polyester fabric to make it rugged and resistant to strong impacts.

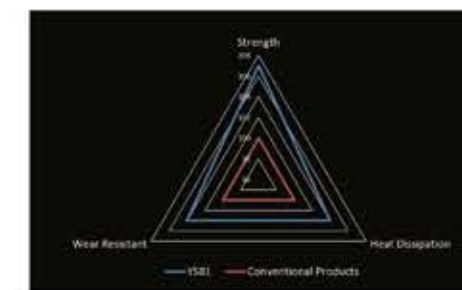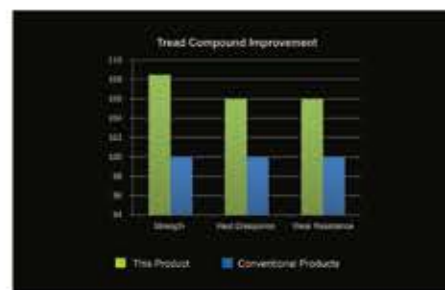


	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
15	30×9.50R15LT	104Q	6PR	756	240	15.3	7 1/2J
	31×10.50R15LT	109Q	6PR	781	268	15.3	8 1/2J
	33×12.50R15LT	108Q	6PR	832	318	15.3	10J
	35×12.50R15LT	113Q	6PR	883	318	15.3	10J
	LT235/75R15	104/101Q	6PR	739	235	15.3	6 1/2J
16	LT235/85R16	120/116Q	10PR	812	235	15.3	6 1/2J
	LT245/75R16	120/116Q	10PR	780	248	15.3	7J
	LT265/75R16	123/120Q	10PR	810	267	15.3	7 1/2J




TERRAMAX HLT

PERFORMANCE RATINGS:

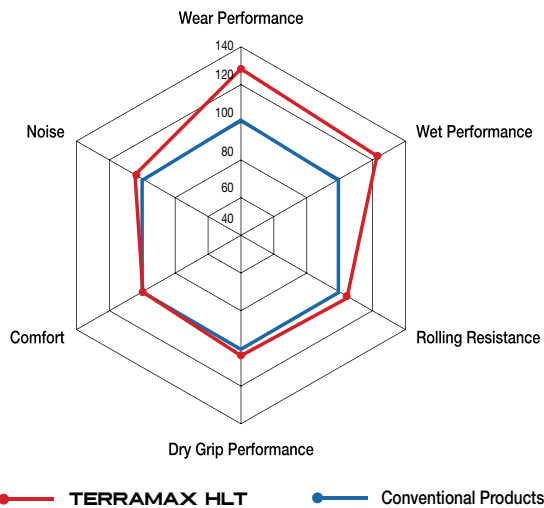

- Large Block Face**
The large block face design effectively increases the ground contact area of the tire to improve overall handling, wear and grip performance.
- Four Extra Wide Main Grooves**
Four widened main grooves enhance directional stability and water drainage to allow for an excellent handling and traction on wet and dry roads.
- Pattern Pitch Optimization**
The pattern pitch arrangement effectively reduces noise to create a quieter driving experience.

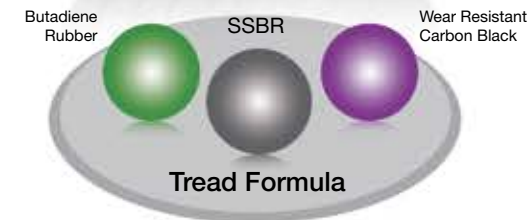

High-Performance Tread Compound
A specialized mixture of SBR solution and ultra-wearable carbon black particles allows this tire to boast a longer life while also providing improved wet skid resistance and wear resistance.

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	235/75R15	105T	--	733	235	9	6 1/2J	600/A/A
16	215/70R16*	100H	--	708	221	9	6 1/2J	600/A/A
	235/70R16	106T	--	736	240	9	7J	600/A/A
	245/70R16	107T	--	750	248	9	7J	600/A/A
	255/70R16	111T	--	764	260	9	7 1/2J	600/A/A
	265/70R16	112T	--	778	272	9	8J	600/A/A
	245/75R16	111T	--	774	248	9	7J	600/A/A
	265/75R16	116T	--	804	267	9	7 1/2J	600/A/A
	LT225/75R16*	115/112R	10PR	744	223	11.5	6J	--
17	LT245/75R16	120/116R	10PR	774	248	11.5	7J	--
	LT265/75R16	123/120S	10PR	804	267	11.5	7 1/2J	--
	LT215/85R16*	115/112R	10PR	772	216	11.5	6J	--
	LT235/85R16*	120/116R	10PR	806	235	11.5	6 1/2J	--
	225/65R17*	102H	--	724	228	9	6 1/2J	600/A/A
	235/65R17	104T	--	738	240	9	7J	600/A/A
	245/65R17	107T	--	750	248	9	7J	600/A/A
	265/65R17*	112S	--	776	272	9	8J	600/A/A
	245/70R17	110T	--	776	248	9	7J	600/A/A
	265/70R17	115T	--	804	272	9	8J	600/A/A
18	LT245/70R17	119/116S	10PR	776	248	11.5	7J	--
	LT265/70R17	121/118S	10PR	804	272	11.5	8J	--
	LT245/75R17	121/118S	10PR	800	248	11.5	7J	--
	LT235/80R17*	120/117R	10PR	808	235	11.5	6 1/2J	--
	235/55R18*	100V	--	715	245	9	7 1/2J	600/A/A
	255/55R18*	109V XL	--	737	265	9	8J	600/A/A
	235/60R18*	103H/V	--	739	240	9	7J	600/A/A
	245/60R18*	105H	--	751	248	9	7J	600/A/A
	265/60R18*	110H	--	775	272	9	8J	600/A/A
	235/65R18*	106H	--	763	240	9	7J	600/A/A
	255/65R18*	111S	--	789	260	9	7 1/2J	600/A/A
	275/65R18	116T	--	815	279	9	8J	600/A/A
20	LT275/65R18	123/120S	10PR	815	279	11.5	8J	--
	LT265/70R18*	124/121S	10PR	829	272	11.5	8J	--
	LT275/70R18	125/122S	10PR	843	279	11.5	8J	--
	275/55R20*	117T XL	--	810	284	9	8 1/2J	600/A/A
	275/60R20*	115T	--	838	279	9	8J	600/A/A
	LT275/65R20*	126/123S	10PR	866	279	11.5	8J	--

Outlined White Letter

215/70R16 LT225/75R16 LT215/85R16 LT235/85R16 225/65R17 265/65R17 LT235/80R17 235/55R18 255/55R18
235/60R18 245/60R18 265/60R18 235/65R18 255/65R18 255/65R18 LT265/70R18 275/55R20 275/60R20
LT275/65R20 Black Sidewall



TERRAMAX



PERFORMANCE RATINGS:

Tread Life: 10


- Aggressive open shoulder tread design expels water, snow, slush and mud for optimum traction in all terrain conditions.
- Solid center rib provides superior comfort and control.
- Extra deep tread sipes at varying angles improves comfort without sacrificing traction.



Improved high speed stability and traction on dry and wet roads.



Can effectively prevent uneven wear to improve off-road performance.



TERRAMAX A/T

Domineering style that effectively dissipates heat when driving long distances and at high speeds.

A shield design protects the alloy rims from collisions, impacts, and supports the sidewall.

Strengthens the sidewall to improve abrasion resistance.



Aggressive open shoulder tread design: efficiently expels snow, water, slush, and mud for optimum traction in all-terrain conditions.



Provides superior comfort and handling.



Multi-directional sipe system: Extra deep tread sipes at varying angles improve comfort without sacrificing traction.



TERRAMAX A/T

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	235/70R15	103S	711	240	10.5	7J	500/A/B
	265/70R15	112S	753	272	10.5	8J	500/A/B
	215/75R15	100S	703	216	10	6J	500/A/B
	235/75R15	109S XL	733	235	10.5	6 1/2J	500/A/B
	225/75R15C	110/108S	719	223	12.5	6J	
	LT215/75R15	100/97R	703	216	12.5	6J	
	LT235/75R15	104/101R	733	235	13	6 1/2J	
	31×10.50R15LT	109S	775	268	13	8 1/2J	
16	235/70R16	106S	736	240	10.5	7J	500/A/B
	245/70R16	107S	750	248	10.5	7J	500/A/B
	265/70R16	112T	778	272	10.5	8J	500/A/B
	275/70R16	114S	792	279	10.5	8J	500/A/B
	LT245/70R16	113/110S	750	248	13	7J	
	245/75R16	111S	774	248	10.5	7J	500/A/B
	265/75R16	116S	804	267	10.5	7 1/2J	500/A/B
	LT225/75R16*	115/112S	744	223	13	6J	
	LT245/75R16	120/116S	774	248	13	7J	
	LT265/75R16	123/120S	804	267	13	7 1/2J	
	LT285/75R16	126/123R	834	286	13	8J	
	LT235/85R16*	120/116R	806	235	13	6 1/2J	
	205R16C	110/108Q	736	208	12.5	6J	
17	235/65R17	104S	738	240	10.5	7J	500/A/B
	245/65R17	107S	750	248	10.5	7J	500/A/B
	265/65R17	112S	776	272	10.5	8J	500/A/B
	275/65R17	115S	790	279	10.5	8J	500/A/B
	245/70R17	110T	776	248	10.5	7J	500/A/B
	265/70R17	115S	804	272	10.5	8J	500/A/B
	LT245/70R17	119/116S	776	248	13	7J	
	LT265/70R17	121/118S	804	272	13	8J	
	LT285/70R17	121/118R	832	292	13	8 1/2J	
	LT245/75R17	121/118S	800	248	13	7J	
	LT235/80R17	120/117R	808	235	13	6 1/2J	

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
18	265/60R18*	110T	775	272	10.5	8J	
	265/65R18	114T	801	272	10.5	8J	500/A/B
	275/65R18	116T	815	279	10.5	8J	500/A/B
	LT275/65R18	123/120R	815	279	13	8J	
	LT265/70R18*	124/121R	829	272	13	8J	
	LT275/70R18	125/122R	843	279	13	8J	
20	265/50R20	111T XL	774	277	10.5	8 1/2J	500/A/B
	275/55R20*	117T XL	810	284	10.5	8 1/2J	500/A/B
	LT305/55R20*	121/118R	844	316	13	9 1/2J	
	275/60R20*	115T	838	279	10.5	8J	500/A/B
	LT265/60R20*	121/118R	826	272	13	8J	
	LT275/60R20*	123/120R	838	279	13	8J	
	LT325/60R20	126/123R	898	331	13	9 1/2J	
	LT275/65R20*	126/123R	866	279	13	8J	

Outlined White Letter
LT225/75R16 LT235/85R16 LT265/70R18 275/55R20 275/60R20 LT275/65R20 265/60R18 LT305/55R20
LT275/65R20 Black Sidewall



TERRAMAX

AT-M

PERFORMANCE RATINGS:

Wet Performance:  8

Dry Performance:  10

Ride Comfort:  7

Quietness:  7

Tread Life:  10

Traction Performance

Widened running surface ensures superior traction performance in all types of road surfaces.



Climbing Performance

Tread blocks maintain a staggered bite to improve traction and climbing ability.

Efficient Self-Cleaning Performance

Widened shoulder grooves and nodules within the tread grooves effectively eject mud, sand, gravel, and other debris to improve grip.



Strong Sidewall

Lengthened tread shoulder employs a multi-layered protruding design that improves strength and prevents damage to the carcass, allowing for a safe off-roading experience.

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	31×10.50R15LT	109S	6PR	775	268	13	13J	
16	245/70R16	107S		750	248	10.5	11J	500/A/B
	265/70R16	112T		778	272	10.5	7J	500/A/B
17	265/65R17	112S		776	272	10.5	8J	500/A/B
18	265/60R18*	110T		775	272	10.5	12J	500/A/B
20	265/50R20*	111T		774	277	10.5	10J	500/A/B
	275/55R20*	117T		810	284	10.5	9J	500/A/B

Outlined White Letter

265/60R18 265/50R20 275/55R20 Raised White Letter




TERRAMAX

AT4S



PERFORMANCE RATINGS:

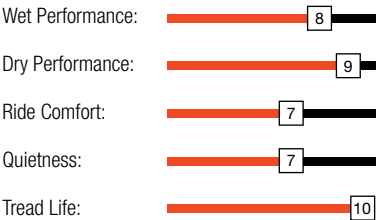

Shoulder Edge Design

The trapezoidal claw design improves traction in snow and mud, enhances shoulder heat dissipation, and strengthens overall tire durability.



Jagged Edge Tread Block

The trapezoidal claw design improves traction in snow and mud, enhances shoulder heat dissipation, and strengthens overall tire durability.



Zigzag Groove Pattern

The central zigzag tread block provides outstanding grip and traction performance.



Open Shoulder and Anti-Stone Lodging Design

The open shoulder design increases stability and traction when turning at high speeds in both dry and wet weather. The anti-stone lodging design effectively discharges stones, withstands harsh road conditions, and protect the tread from damage.

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	235/75R15	109S XL	--	733	235	10.5	6 1/2J	500/A/B
	31x10.50R15LT	109S	6PR	775	268	13	8 1/2J	--
16	235/70R16	106S	--	736	240	10.5	7J	500/A/B
	265/70R16	112T	--	778	272	10.5	8J	500/A/B
	245/75R16	111S	--	774	248	10.5	7J	500/A/B
	265/75R16	116S	--	804	267	10.5	7 1/2J	500/A/B
	LT225/75R16*	115/112S	10PR	744	223	13	6J	--
	LT245/75R16*	120/116S	10PR	774	248	13	7J	--
	LT265/75R16	123/120S	10PR	804	267	13	7 1/2J	--
	LT285/75R16	122/119R	8PR	834	286	13	8J	--
	LT285/75R16	126/123S	10PR	834	286	13	8J	--
	LT235/85R16*	120/116S	10PR	806	235	13	6 1/2J	--
17	245/65R17	107S	--	750	248	10.5	7J	500/A/B
	265/65R17	112S	--	776	272	10.5	8J	500/A/B
	265/70R17	115S	--	804	272	10.5	8J	500/A/B
	LT245/70R17	119/116S	10PR	776	248	13	7J	--
	LT265/70R17	121/118S	10PR	804	272	13	8J	--
	LT285/70R17	121/118R	8PR	832	292	13	8 1/2J	--
	LT285/70R17	121/118S	10PR	832	292	13	8 1/2J	--
	LT245/75R17	121/118S	10PR	800	248	13	7J	--
	LT235/80R17	120/117R	10PR	808	235	13	6 1/2J	--
18	275/65R18	116T	--	815	279	10.5	8J	500/A/B
	LT275/65R18	123/120S	10PR	815	279	13	8J	--
	LT265/70R18*	124/121R	10PR	829	272	13	8J	--
	LT275/70R18	125/122R	10PR	843	279	13	8J	--
20	275/55R20*	117T XL	--	810	284	10.5	8 1/2J	500/A/B
	275/60R20*	115T	--	838	279	10.5	8J	500/A/B
	LT275/65R20*	126/123S	10PR	866	279	13	8J	--

Outlined White Letter


LT225/75R16 LT245/75R16 LT235/85R16 LT265/70R18 275/55R20 275/60R20 LT275/65R20 Black Sidewall



ALL-SEASON LUXURY CROSSOVER & SUV TIRE

TERRAMAX CVR

PERFORMANCE RATINGS:

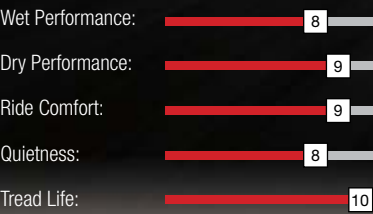

The **TERRAMAX CVR** is an all-season tire specifically engineered for SUV and crossovers. The CVR delivers exceptional handling and stability for today's crossover vehicles without compromising ride comfort.

- Smooth and quiet ride for a more comfortable driving experience.
- Top all-around performance on wet and dry roads.
- Excellent handling and a stable ride, especially at high speeds.
- Durable and long lasting design.
- Suitable for off-road usage.
- H, V, W rated construction.



Large shoulder blocks and center ribs provide responsiveness and high speed stability.



Widened tread design offers a larger ground contact area which effectively improves grip performance.



Tread design offers greater driving comfort and reduces noise emissions.

Four main grooves and small gradually winding lateral grooves reduce rolling resistance and effectively drain water for improved hydroplaning resistance.

The strong casing and special tread compound increases service life, driving comfort and excellent overall driving performance.



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
15	205/70R15	96H	669	209	8.2	6J	440/A/A
	225/70R15	100H	697	228	8.2	6 1/2J	500/A/B
	255/70R15	108T	739	260	9	7 1/2J	500/A/B
	235/60R16	100H	688	240	8.2	7J	440/A/A
16	215/65R16	102H XL	686	221	8.2	6 1/2J	440/A/A
	215/70R16	100H	708	221	9	6 1/2J	440/A/A
	225/70R16	103H	722	228	9	6 1/2J	500/A/B
	235/70R16	106H	736	240	9	7J	440/A/A
	245/70R16	111H XL	750	248	9	7J	440/A/A
	255/70R16	111T	764	260	9	7 1/2J	500/A/B
	265/70R16	112H	778	272	9	8J	440/A/A
	275/70R16	114T	792	279	9	8J	500/A/B
	265/75R16	116T	804	267	9	7 1/2J	500/A/B
	235/55R17	103V XL	690	245	8.2	7 1/2J	420/A/A
	215/60R17	96H	690	221	8.2	6 1/2J	440/A/A
17	225/60R17	99H	702	228	8.2	6 1/2J	440/A/A
	225/65R17	102H	724	228	8.2	6 1/2J	440/A/A
	235/65R17	108H XL	738	240	9	7J	440/A/A
	245/65R17	107T	750	248	9	7J	500/A/B
	265/65R17	112T	776	272	9	8J	500/A/B
	275/65R17	115T	790	279	9	8J	500/A/B
	245/70R17	110T	776	248	9	7J	500/A/B
	265/70R17	115T	804	272	9	8J	500/A/B
	225/55R18	98V	705	233	8.2	7J	420/A/A
	235/55R18	100V	715	245	8.2	7 1/2J	420/A/A
	255/55R18	109V XL	737	265	9	8J	420/A/A
18	235/60R18	103V	739	240	8.2	7J	440/A/A
	245/60R18	105H	751	248	9	7J	500/A/A
	265/60R18	110T	775	272	9	8J	500/A/B
	235/65R18	106T	763	240	9	7J	500/A/B
	255/65R18	111T	789	260	9	7 1/2J	500/A/B
	265/65R18	112T	801	272	9	8J	500/A/B
	275/65R18	116T	815	279	9	8J	500/A/B
	255/70R18	113T	815	260	9	7 1/2J	500/A/B
	235/50ZR19	99W	719	245	8.2	7 1/2J	420/A/A
	255/50R19	107V XL	739	265	9	8J	420/A/A
	225/55R19	99V	731	233	8.2	7J	420/A/A
19	235/55R19	101V	741	245	8.2	7 1/2J	420/A/A
	245/55R19	103V	753	253	9	7 1/2J	420/A/A
	245/50R20	102H	754	253	8.2	7.5J	500/A/A
	255/50R20	109W XL	764	265	9	8J	420/A/A



COMMERCIO


VX1

PERFORMANCE RATINGS:



The **COMMERCIO VX1** is a light truck tire engineered for commercial delivery and demanding regional applications. Featuring an enhanced compound to resist tire damage, as well as a reinforced casing to improve load capacity. The Comercio VX1 delivers exceptional mileage and tread life.

New profile design with a significantly improved carrying capacity. Strengthened tread construction, abrasion resistance and puncture resistance. Special tread formula enhances traction and improves skid resistance.

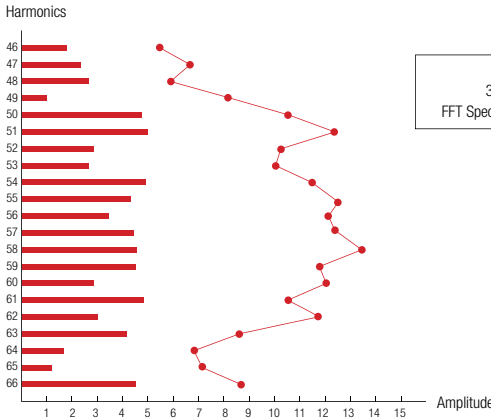

Variable Pitch Design
The tread is constructed with a variable pitch design which significantly reduces noise emissions for a more comfortable driving experience.



- 1 The new sipe design on the center blocks and shoulder improve handling and grip, dissipate heat, improve traction, and offer greater driving comfort.
- 2 Block groove angles help reduce noise emissions.



Main Groove Design
Three main grooves are designed to effectively drain water and offer greater high speed stability on wet and dry roads; improved traction and hydroplaning resistance.

Long Tread Life
The shoulder pattern design promotes uniform wear to offer grater mileage. Enhanced trad structure and tread formula improve wear and puncture resistance.

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
13	165R13C	94/93S	8PR	594	165	8.2	4.50B
	175R13C	97/95S	8PR	608	178	8.2	5.00B
14	175/65R14C	90/88T	6PR	584	177	8.5	5J
	165/70R14C	89/87T	6PR	588	170	8.5	5J
	205/75R14C	109/107R	8PR	664	203	9	5 1/2J
	205/75R14C*	109/107R	8PR	664	203	9	5 1/2J
	205/65R15C	102/100T	6PR	647	209	9.5	6J
15	215/65R15C	104/102S	6PR	661	221	9.5	6 1/2J
	195/70R15C	104/102R	8PR	655	201	9.5	6J
	205/70R15C	106/104R	8PR	669	209	9.5	6J
	215/70R15C	109/107R	8PR	683	221	10	6 1/2J
	225/70R15C	112/110R	8PR	697	228	10	6 1/2J
	195/60R16C	99/97H	6PR	640	201	9.5	6J
	215/60R16C	108/106S	8PR	664	221	9.5	6 1/2J
	195/65R16C	104/102T	8PR	660	201	9.5	6J
16	205/65R16C	107/105T	8PR	672	209	9.5	6J
	215/65R16C	109/107R	8PR	686	221	9.5	6 1/2J
	225/65R16C	112/110R	8PR	698	228	10	6 1/2J
	235/65R16C	115/113R	8PR	712	240	10	7J
	235/65R16C	121/119R	10PR	712	240	10	7J
	195/75R16C	107/105Q	8PR	698	196	9.5	5 1/2J
	205/75R16C	110/108R	8PR	714	203	9.5	5 1/2J
	215/75R16C	113/111R	8PR	728	216	10	6J


Outlined White Letter
205/75R14C White Ring



COMMERCIO VX+



PERFORMANCE RATINGS:

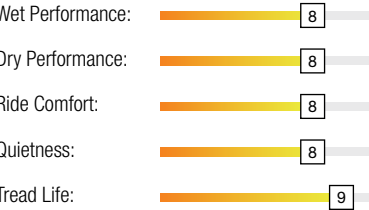

Sipe Design
The sipe design is optimized for wet weather driving. Improved handling and traction in wet weather conditions.




	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
12	155R12C	83/81P	6PR	550	157	8	4.50B
	155R12C	88/86N/P	8PR	550	157	8	4.50B
13	155R13C	85/83N	6PR	578	157	8	4 1/2B
	165R13C	91/89N	6PR	596	167	8	4 1/2B
	165R13C	94/93P	8PR	596	167	8	4 1/2B
	155R13C	90/88N	8PR	578	157	8	4 1/2B
14	185R14C	102/100Q	8PR	650	188	9	5 1/2J
	195R14C	106/104Q	8PR	666	198	9	5 1/2J
	205R14C	109/107R	8PR	686	208	9.5	6J
	165/70R14C	89/87R	6PR	588	170	8	5J
	195R15C	106/104S	8PR	690	198	9	5 1/2J
15	195/70R15C	104/102R	8/10PR	655	201	9	6J
	225/70R15C	112/110R	8PR	697	228	9.5	6 1/2J
	205/65R16C	107/105T	8PR	672	209	9.5	6J
	195/75R16C	110/108Q	10PR	698	196	9	5 1/2J
	215/75R16C	116/114R	10PR	728	216	9.5	6J



SL12

The **SL12** is an all-season light truck tyre designed for delivery and demanding regional applications. Featuring a symmetrical pattern with extra wide grooves, the SL12 delivers excellent wet traction, and a quiet-comfortable ride, while the enhanced compound is engineered to deliver exceptional mileage.

PERFORMANCE RATINGS:

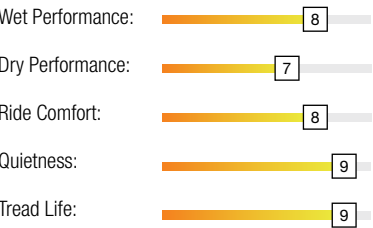

Full-depth microspikes
Improve heat dissipation
and traction.



Extra-wide zigzag grooves
deliver enhanced wet traction
and exceptional low speed
traction.

Wide shoulder reduces noise
emissions and improves stability.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
14	185R14C*	102/100Q	8PR	650	188	9	5 1/2J
	185R14C	102/100Q	8PR	650	188	9	5 1/2J
	195R14C*	106/104Q	8PR	666	198	9	5 1/2J
	195R14C	106/104Q	8PR	666	198	9	5 1/2J
	205R14C*	109/107R	8PR	686	208	9.5	6J
	205R14C	109/107R	8PR	686	208	9.5	6J
15	215R14C	112/110Q	8PR	700	218	9.5	6J
	195R15C*	106/104S	8PR	690	198	9	5 1/2J
	195R15C	106/104S	8PR	690	198	9	5 1/2J
	195/80R15C	107/105L	8PR	690	198	9	5 1/2J


Black Sidewall
185R14C 195R14C 205R14C 195R15C* Both Black Sidewall & White Ring are Available



LIGHT TRUCK TIRE

EXTMILE SL15

PERFORMANCE RATINGS:

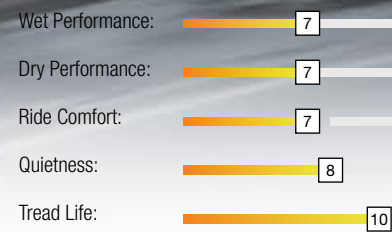

1. Shoulder groove design reduces heat buildup which improves durability.
2. Strengthened carcass ensures overall tire strength to ensure greater load capacity.
3. Specialized tread formula greatly improves scrub and tear resistance.



Shoulder Groove Design

Reduces heat buildup which improves durability.



Close Shoulder Design

Ensures greater scrub and tear resistance.



Pipe-like Grooves


Optimizes ground pressure distribution for enhanced grip capabilities.



LIGHT TRUCK TIRE

EXTMILE SL16


PERFORMANCE RATINGS:

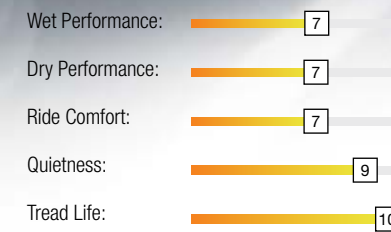

SAILUN EXTMILE SERIES

New casing design improves tire strength to ensure greater load bearing capabilities.

The new tread pattern design applies a more even grip for improved wear resistance and to promote even tread wear. Widened s-shaped grooves effectively drain water and reduce stone retention. New sidewall aesthetics added.

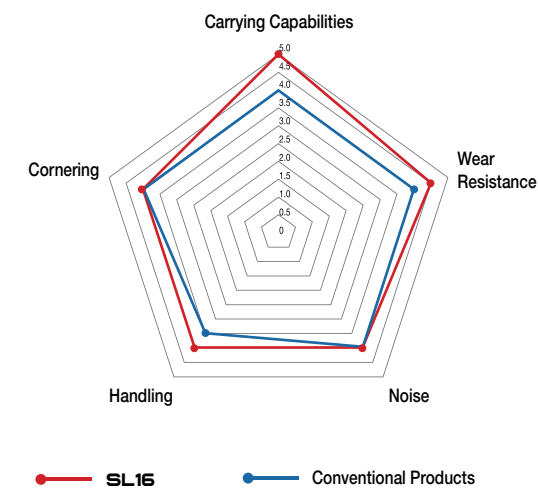

SL16

has noticeable improvements in wear resistance, load carrying capacity, and handling.

Strengthened Casing

New casing design improves strength for greater load bearing capabilities.

Optimized Tread Pattern Design

Even grip effectively improves wear resistance.

S-shaped Widened Grooves

Widened S-shaped Grooves Effectively drains water and reduces stone retention.

Sidewall Design

Three-dimensional design just below the shoulder improves tire aesthetics.


	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
16	6.50R16LT	107/102Q	10PR	750	185	10	5.50F

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
15	7.00R15LT	110/105N	10PR	750	200	10	5.50F
16	7.00R16LT	111/107Q	10PR	778	202	10.3	5.50F
	7.50R16LT	122/118N	14PR	805	215	10	6.00G



ENDURE WSL1

PERFORMANCE RATINGS:

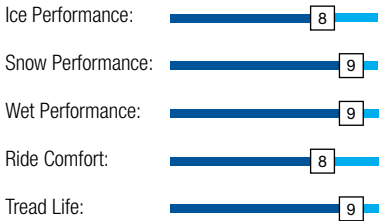

ENDURE WSL1

Winter Snow Tire specifically designed for commercial light trucks. Specially designed formula used to conquer winter weather; provides optimal grip and stopping power on snow and ice.



Sidewall protection designed to resist against sidewall impacts and kerbing wear.



Main zigzag groove design and jagged shoulder grooves effectively drain water and snow for greater handling in wet and snowy weather conditions.



Staggered tread blocks improve handling safety while also providing greater traction.



Greater load bearing capability. Large block pattern improves load carrying capabilities and greater handling performance.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
14	175/65R14C	90/88T	6PR	584	177	9.6	5J
	185R14C	102/100R	8PR	650	188	9.6	5 1/2J
	195R14C	106/104R	8PR	666	198	10	5 1/2J
15	205/65R15C	102/100R	6PR	647	209	10	6J
	195/70R15C	104/102R	8PR	655	201	10	6J
	205/70R15C	106/104R	8PR	669	209	10	6J
	215/70R15C	109/107R	8PR	683	221	10	6 1/2J
	225/70R15C	112/110R	8PR	697	228	10	6 1/2J
	195/60R16C	99/97T	6PR	640	201	10	6J
16	215/60R16C	103/101T	6PR	664	221	10	6 1/2J
	195/65R16C	104/102R	8PR	660	201	10	6J
	205/65R16C	107/105T	8PR	672	209	10	6J
	215/65R16C	109/107T	8PR	686	221	10	6 1/2J
	225/65R16C	112/110R	8PR	698	228	10	6 1/2J
	235/65R16C	121/119R	10PR	712	240	10	7J
	185/75R16C	104/102R	8PR	684	184	9.6	5J
	195/75R16C	107/105R	8PR	698	196	10	5 1/2J
	205/75R16C	113/111R	10PR	714	203	10	5 1/2J
	215/75R16C	116/114R	10PR	728	216	10	6J
	225/75R16C	121/120R	10PR	744	223	10	6J



STUDLESS WINTER TIRE

ICE BLAZER WSL2



PERFORMANCE RATINGS:

Ice Performance: 

Snow Performance: 

Dry Performance: 

Ride Comfort: 

Quietness: 

The **ICE BLAZER WSL2** is a studless winter tire, providing excellent slush, snow, and wet traction in cold climate conditions, while delivering a quiet and comfortable ride on dry roads.

- Green technology: Extensive use of environmentally friendly materials that meet European REACH requirements.
- Special tread formula compounds allows the rubber to maintain flexibility in extreme cold temperatures for maximum performance potential. This improves handling and overall safety for winter weather conditions.



Unique Groove Design:
The L-shaped grooves are specifically designed enhance grip on snow, slush, and water without compromising road noise.



Outer Tread Block Design:
Optimized to improve self-cleaning capabilities while also maximizing stability and overall grip in winter weather conditions. Minimized noise emissions.



Mutli-directional high density siping:
Engineered to maximize directional grip on snow and ice while also minimizing road noise.



	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
13	175/65R13	80T	558	177	8.7	5B
	155/70R13	75T	548	157	8	4 1/2B
	165/70R13	79T	562	170	8	5B
	165/70R13	83T XL	562	170	8	5B
	175/70R13	82T	576	177	8.7	5B
	155/80R13	79T	578	157	8	4 1/2B
14	185/60R14	82T	578	189	8.7	5 1/2J
	155/65R14	75T	558	157	8	4 1/2J
	175/65R14	82T	584	177	8.7	5J
	185/65R14	86T	596	189	8.7	5 1/2J
	165/70R14	81T	588	170	8	5J
	175/70R14	84T	602	177	8.7	5J
	185/70R14	88T	616	189	8.7	5 1/2J
15	195/50R15	82H	577	201	8.7	6J
	185/55R15	82H	585	194	8.7	6J
	195/55R15	85H	595	201	8.7	6J
	185/60R15	84T	603	189	8.7	5 1/2J
	185/60R15	88T XL	603	189	8.7	5 1/2J
	195/60R15	88H	615	201	8.7	6J
	165/65R15	81T	595	170	8	5J
	175/65R15	84T	609	177	8.7	5J
	185/65R15	88T	621	189	8.7	5 1/2J
	195/65R15	91T	635	201	8.7	6J
	195/65R15	95T XL	635	201	8.7	6J
	205/65R15	94H	647	209	9.1	6J
	205/55R16	91H/T	632	214	9.1	6 1/2J
16	205/55R16	94H XL	632	214	9.1	6 1/2J
	215/55R16	93H	642	226	9.1	7J
	225/55R16	99H XL	654	233	9.1	7J
	205/60R16	92H	652	209	9.1	6J
	205/60R16	96H XL	652	209	9.1	6J
	215/60R16	95H	664	221	9.1	6 1/2J
	215/65R16	98H	686	221	9.1	6 1/2J
17	225/45R17	94H XL	634	225	9.1	7 1/2J
	205/50R17	93H XL	638	214	9.1	6 1/2J
	225/50R17	98H XL	658	233	9.1	7J
18	245/40R18	97V XL	653	248	9.1	8 1/2J




STUDLESS WINTER TIRE

ICE BLAZER ALPINE




PERFORMANCE RATINGS:

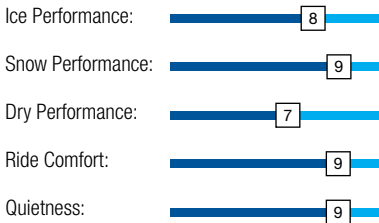

ICE BLAZER ALPINE


The latest generation of HP Alpine winter tire for cars and family sedans massively contributes on driver's safety as it provides optimum stability and control on snow, wet and dry roads.

- Advanced technology has created a tire that provides excellent traction and braking performance on snow, wet and even dry roads.
- The spear-shape pattern disperses snow and water quickly and keeps the tire in contact with the road to function perfectly in various wintry conditions.
- The functionalized 100% silica compound not only maximizes tire grip, reduces rolling resistance and wear, but also maintains flexibility in extreme cold temperatures.

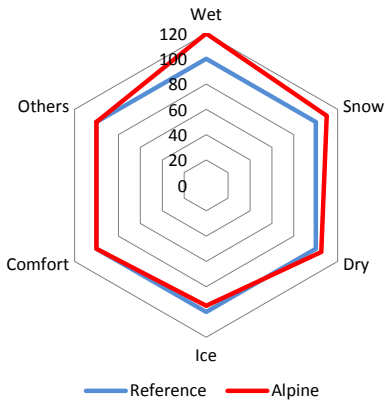

V-shape Directional Pattern Design

V-shape pattern improves hydroplaning, wet and snow traction and braking.

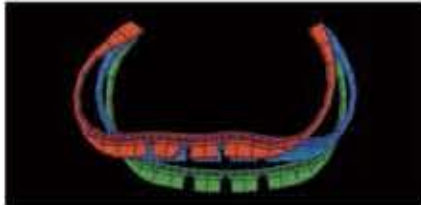

Maximized Snow Traction

A variable pitch design, and increased lateral grooves and sipes provide greater wet and snow performance.

Optimized Pitch Sequence

Reduce generated noise and enhance anti-vibration which also promotes uniform tread wear.

Optimized Tread Profile

Improves steering response and driving comfort.

100% Silica Compound Technology

Silica compound helps improve both tire grip and offer lower rolling resistance for more efficient tread wear.



Cold Weather Compound nd with hardness tuned

Maintains optimum hardness and flexibility in winter weather conditions for consistent tire performance.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
13	155/65R13	73T	532	157	8	4.50B,4 1/2B
	175/65R13	80T	558	177	8	5.00B,5B
	155/70R13	75T	548	157	8	4.50B,4 1/2B
	165/70R13	79T	562	170	8	5.00B,5B
	165/70R13	83T XL	562	170	8	5.00B,5B
	175/70R13	82T	576	177	8	5.00B/5B
	155/80R13	79T	578	157	8	4.50B
14	185/55R14	80T	560	194	8.5	6J
	165/60R14	79T XL	554	170	8	5.00B,5J
	185/60R14	82T	578	189	8.5	5 1/2J
	155/65R14	75T	558	157	8	4.50B,4 1/2J
	165/65R14	79T	570	170	8	5.00B,5J
	175/65R14	82T	584	177	8	5.00B,5J
	185/65R14	86H	596	189	8.5	5 1/2J
	195/65R14	89T	610	201	8.5	6J
	165/70R14	81T	588	170	8	5.00B,5J
	175/70R14	84T	602	177	8	5.00B/5J
	195/50R15	82H	577	201	8.5	6J
	205/50R15	86H	587	214	8.5	6 1/2J
15	175/55R15	77T	573	182	8	5 1/2J
	185/55R15	82H	585	194	8.5	6J
	195/55R15	85H	595	201	8.5	6J
	195/55R15	89H XL	595	201	8.5	6J
	175/60R15	81H	591	177	8	5J
	185/60R15	84T	603	189	8.5	5 1/2J
	185/60R15	88T XL	603	189	8.5	5 1/2J
	195/60R15	88H	615	201	8.5	6J
	205/60R15	91H	627	209	8.5	6J
	175/65R15	84T	609	177	8	5J
	185/65R15	88H	621	189	8.5	5 1/2J
	195/65R15	91T	635	201	8.5	6J
	195/65R15	95T XL	635	201	8.5	6J
	205/65R15	94H	647	209	8.5	6J
	215/65R15	96H	661	221	8.5	6 1/2J
	195/45R16	84H XL	582	195	8.5	6 1/2J
	205/45R16	87H XL	590	206	8.5	7J
16	185/55R16	87H XL	610	194	8.5	6J
	195/55R16	87H	620	201	8.5	6J
	205/55R16	91H/T	632	214	8.5	6 1/2J
	205/55R16	94H XL	632	214	8.5	6 1/2J
	205/60R16	92H	652	209	8.5	6J
	205/60R16	96H XL	652	209	8.5	6J
	215/60R16	95H	664	221	8.5	6 1/2J
	215/65R16	98H	686	221	8.5	6 1/2J
	205/50R17	93H XL	638	214	8.5	6 1/2J




STUDDABLE WINTER TIRE

ICE BLAZER WST1



PERFORMANCE RATINGS:

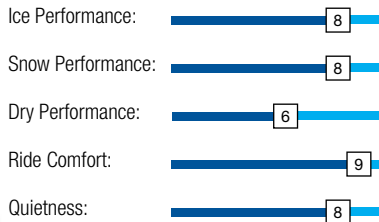

The **ICE BLAZER WST1** is a studdable winter tire designed for drivers that demand maximum traction in severe winter weather conditions, letting you outperform the elements to get more out of the winter season.


- Green technology: Extensive use of environmentally friendly materials that meet European REACH requirements.
- Specially formulated tread compound allows the tread rubber to maintain flexibility for exceptional performance in extreme cold temperatures. Improved safety and handling in winter weather conditions (indicated with the Severe Service Emblem).
- Specially blended tread rubber formula for excellent grip in low temperatures.



Special Buffer Layer

Special rubber buffer layer at the bottom of the stud absorbs the impact force of snow to prevent the fall in/out of studs.

ANTI-SKID PROPERTY

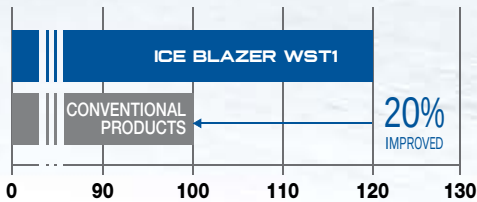

Innovative Square Design

Increases the ground contact area of the tire to effectively improve grip performance and increase skid resistance.



Cold-Resistant Tread Rubber

Tread formula compounds ensure the tire maintains elasticity and softness in extreme cold weather conditions. This improves grip on ice and snow, improves hydroplaning resistance, and lowers rolling resistance.



V-shaped Tread Design

Improved grip on ice and snow, skid resistance, and effectively reduces noise emissions.

Sipe Design

Optimized sipe design ensures greater grip on ice and snow.

Improved Studded Technology

12 rows of studs are designed to maximize grip and traction performance for safer driving in winter weather.

Sipe Design

Optimized depth and length of sipes maintain tread rigidity and greatly enhance grip and handling.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
13	155/70R13	75T		548	157	10	4 1/2B
	165/70R13	79T		562	170	10	5B
	175/70R13	82T		576	177	10	5B
	155/80R13	79T		578	157	10	4 1/2B
14	185/60R14	82T		578	189	10	5 1/2J
	155/65R14	75T		558	157	10	4 1/2J
	165/65R14	79T		570	170	10	5J
	175/65R14	82T		584	177	10	5J
	175/65R14C	90/88Q	6PR	584	177	10	5J
	185/65R14	86T		596	189	10	5 1/2J
	175/70R14	84T		602	177	10	5J
	185/70R14	88T		616	189	10	5 1/2J
	185R14C	102/100Q	8PR	650	188	10	5 1/2J



ICE BLAZER WST1

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
15	185/55R15	82T		585	194	10	6J
	185/60R15	84T		603	189	10	5 1/2J
	195/60R15	88T		615	201	10	6J
	175/65R15	84T		609	177	10	5J
	185/65R15	88T		621	189	10	5 1/2J
	195/65R15	91T		635	201	10	6J
	205/65R15	94T		647	209	10	6J
	215/65R15	96T		661	221	10	6 1/2J
	205/70R15	96T		669	209	10	6J
	215/70R15	98T		683	221	10	6 1/2J
	195/70R15C	104/102Q	8PR	655	201	10.5	6J
	205/70R15C	106/104R	8PR	669	209	10.5	6J
	215/70R15C	109/107R	8PR	683	221	10.5	6 1/2J
	225/70R15C	112/110Q	8PR	697	228	10.5	6 1/2J
	235/75R15	105S		733	235	11	6 1/2J
16	205/50R16	87T		612	214	10	6 1/2J
	205/55R16	91T		632	214	10	6 1/2J
	215/55R16	97H XL		642	226	10	7J
	205/60R16	92T		652	209	10	6J
	215/60R16	95T		664	221	10	6 1/2J
	225/60R16	98T		676	228	10	6 1/2J
	195/60R16C	99/97S	6PR	640	201	10.5	6J
	195/65R16C	104/102R	8PR	660	201	10.5	6J
	205/65R16C	107/105Q	8PR	672	209	10.5	6J
	205/65R16	95T		672	209	10	6J
	215/65R16	98T		686	221	10	6 1/2J
	225/65R16	100T		698	228	10	6 1/2J
	235/65R16	103T		712	240	10	7J
	215/65R16C	109/107R	8PR	686	221	10.5	6 1/2J
	225/65R16C	112/110R	8PR	698	228	10.5	6 1/2J
	235/65R16C	115/113R	8PR	712	240	10.5	7J
	235/65R16C	121/119R		712	240	10.5	7J
	215/70R16	100S/T		708	221	11	6 1/2J
	225/70R16	103H/S		722	228	11	6 1/2J
	235/70R16	106S/T		736	240	11	7J
	245/70R16	107S/T		750	248	11	7J
	245/75R16	111S		774	248	11	7J
	195/75R16C	107/105Q	8PR	698	196	10.5	5 1/2J
	205/75R16C	110/108R	8PR	714	203	10.5	5 1/2J
	215/75R16C	113/111R	8PR	728	216	10.5	6J

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
17	215/45R17	91T XL		626	213	10	7J
	225/45R17	94H XL		634	225	10	7 1/2J
	235/45R17	97T XL		644	236	10	8J
	215/50R17	95T XL		648	226	10	7J
	225/50R17	98H XL		658	233	10	7J
	215/55R17	94T		668	226	11	7J
	225/55R17	97T		680	233	11	7J
	235/55R17	99H/V		690	245	10	7 1/2J
	215/60R17	96H/T		690	221	10	6 1/2J
	225/60R17	99H/T		702	228	10	6 1/2J
	235/60R17	102H		714	240	10	7J
	215/65R17	99T		712	221	11	6 1/2J
	225/65R17	102S/T		724	228	11	6 1/2J
	235/65R17	104S/T		738	240	11	7J
	245/65R17	107S/T		750	248	11	7J
	265/65R17	112T		776	272	11	8J
	265/70R17	115S		804	272	11	8J
18	225/40R18	92H XL		637	230	10	8J
	225/45R18	95T XL		659	225	10	7 1/2J
	245/45R18	100H XL		677	243	10	8J
	235/50R18	101T XL		693	245	10	7 1/2J
	215/55R18	95T		693	226	10	7J
	225/55R18	98T		705	233	10	7J
	235/55R18	100H/T		715	245	11	7 1/2J
	255/55R18	105H/V		737	265	10	8J
	225/60R18	100T		727	228	10	6 1/2J
	235/60R18	103H		739	240	10	7J
19	255/50R19	107H XL		739	265	10	8J
	235/55R19	101H		741	245	10	7 1/2J
20	275/40R20	106H XL		728	278	11	9 1/2J



STUDDABLE WINTER TIRE

ICE BLAZER WST2 LT



PERFORMANCE RATINGS:

Ice Performance:  9

Snow Performance:  9

Dry Performance:  7

Ride Comfort:  7

Quietness:  7

A studdable winter tire designed for light trucks, the **WST2 LT** maintains maximum traction while tackling the toughest on-off road conditions, whether it be snow, ice, or mud.

- Green technology: Extensive use of environmentally friendly materials that meet European REACH requirements.
- Specially formulate LT tread compound allows the rubber to maintain flexibility for excellent performance in extreme temperatures. Improves safety and handling in extreme weather conditions (designated with the Severe Service Emblem).
- Specially blended silica-reinforced formula gives the tire excellent grip performance in low temperatures.



	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
16	185/75R16C	104/102R	8PR	684	184	10.5	5J
	LT225/75R16	115/112Q	10PR	744	223	13.5	6J
	LT245/75R16	120/116Q	10PR	774	248	13.5	7J
17	245/70R17	110S		776	248	11.5	7J
	265/70R17	115S		804	272	11.5	8J
	LT245/70R17	119/116Q	10PR	776	248	13.5	7J
	LT265/70R17	121/118Q	10PR	804	272	13.5	8J
	LT245/75R17	121/118R	10PR	800	248	13.5	7J
18	235/60R18	107T XL		739	240	11.5	7J
	245/60R18	105T		751	248	11.5	7J
	265/60R18	110T		775	272	11.5	8J
	235/65R18	106T		763	240	11.5	7J
	265/65R18	114T		801	272	11	8J
	275/65R18	116S		815	279	11.5	8J
	LT275/65R18	123/120R	10PR	815	279	13.5	8J
	255/70R18	113S		815	260	11	7 1/2J
	LT265/70R18	124/121R	10PR	829	272	13	8J
	LT275/70R18	125/122R	10PR	843	279	13	8J
20	245/50R20	102T		754	253	11	7 1/2J
	275/55R20	117S XL		810	284	11.5	8 1/2J
	275/60R20	119S XL		838	279	11.5	8J



Angled groove design:

Efficiently drains slush and water to maximize grip and handling.

Variable pitch sequence:

Optimized to ensure a quiet and smooth ride.






New Studdable Winter Tire

ICE BLAZER WST3

PERFORMANCE RATINGS:

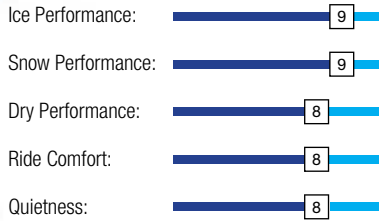

- A winter studded tyre for cars & SUVs, the tire can also be used studies.
- The new replacement of its predecessor, Ice Blazer WST1.


Ice Grip

The stud pattern has been arranged in a calculated variable sequence, along with a new stud hold and pad design which helps ensure studs provide maximum grip on ice.

Winter Traction and Braking

The unidirectional pattern with increased lateral and transverse grooves greatly improves snow, slush and even water drainage.

WST3 Performance

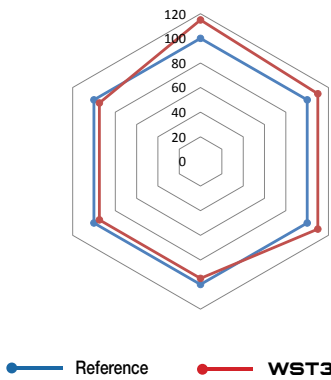

Winter Handling

Multi-layer sipes and the edged saw-tooth blocks provide better steering and stability on snow and ice.




Winter Weather Compound

With the silica-rich tread compound, the winter tire maintains supreme grip thanks to its perfect calibration of hardness and flexibility in extremely cold weather conditions.

ATREZZO ZSR Formula Intro


Increased Snow Traction Index in Pattern Design

Snow Traction Index %

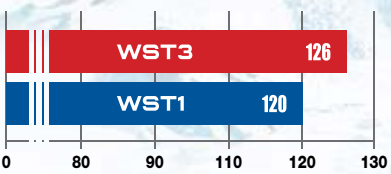

Increased Stud Numbers

Studs/m (of tyre circumference)

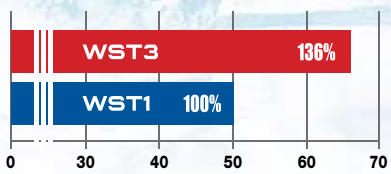

Trafi:

WST3 passed Over-Run testing in Test World Finland; the combination of tire makeup and studs was approved by the Finnish authority.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
13	155/70R13	75T	548	157	9.2	4 1/2B
	165/70R13	79T	562	170	9.2	5.00B/5B
	175/70R13	82T	576	177	9.2	5B
	155/80R13	79T	578	157	9.2	4.50B
	165/80R13	83T	594	165	9.2	4.50B, 4 1/2B
14	185/60R14	82T	578	189	9.2	5 1/2J
	155/65R14	75T	558	157	9.2	4.50B, 4 1/2J
	165/65R14	79T	570	170	9.2	5.00B/5J
	175/65R14	86T XL	584	177	9.2	5J
	185/65R14	90T XL	596	189	9.2	5 1/2J
	175/70R14	84T	602	177	9.2	5.00B/5J
	185/70R14	92T XL	616	189	9.2	5 1/2J
	185/80R14	91Q	652	184	9.2	5J
15	185/55R15	86T XL	585	194	9.2	6J
	185/60R15	88T XL	603	189	9.2	5 1/2J
	195/60R15	88T	615	201	9.2	6J
	175/65R15	84T	609	177	9.2	5J
	185/65R15	92T XL	621	189	9.2	5 1/2J
	195/65R15	95T XL	635	201	9.2	6J
	205/65R15	94T	647	209	9.2	6J
	215/65R15	96T	661	221	9.2	6 1/2J
	205/70R15	100T XL	669	209	9.2	6J
	215/70R15	98T	683	221	9.2	6 1/2J
	235/75R15	105S	733	235	9.2	6 1/2J



ICE BLAZER WST3

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
16	205/50R16	87T	612	214	9.2	6 1/2J
	205/55R16	94T XL	632	214	9.2	6 1/2J
	215/55R16	97T XL	642	226	9.2	7J
	225/55R16	99T XL	654	233	9.2	7J
	205/60R16	96T XL	652	209	9.2	6J
	215/60R16	99T XL	664	221	9.2	6 1/2J
	225/60R16	98T	676	228	9.2	6 1/2J
	205/65R16	95T	672	209	9.2	6J
	215/65R16	102T XL	686	221	9.2	6 1/2J
	215/70R16	100T	708	221	9.2	6 1/2J
	225/70R16	103T	722	228	9.2	6 1/2J
	235/70R16	106T	736	240	9.2	7J
	245/70R16	107T	750	248	9.2	7J
	275/70R16	114T	792	279	9.2	8J
	235/75R16	108T	758	235	9.2	6 1/2J
	245/75R16	111S	774	248	9.2	7J
17	215/45R17	91T XL	626	213	9.2	7J
	225/45R17	94T XL	634	225	9.2	7 1/2J
	235/45R17	97T XL	644	236	9.2	8J
	215/50R17	95T XL	648	226	9.2	7J
	225/50R17	98T XL	658	233	9.2	7J
	215/55R17	98T XL	668	226	9.2	7J
	225/55R17	101T XL	680	233	9.2	7J
	235/55R17	103T XL	690	245	9.2	7 1/2J
	215/60R17	100T XL	690	221	9.2	6 1/2J
	225/60R17	103T XL	702	228	9.2	6 1/2J
	235/60R17	102T	714	240	9.2	7J
	215/65R17	99T	712	221	9.2	5.00B/5J
	225/65R17	102T	724	228	9.2	6 1/2J
	235/65R17	104T	738	240	9.2	7J
	245/65R17	107T	750	248	9.2	7J
	255/65R17	114T XL	764	260	9.2	7 1/2J
	265/65R17	112T	776	272	9.2	8J
	265/70R17	115S	804	272	9.2	8J


	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
18	225/40R18	92H XL	637	230	9.2	8J
	245/40R18	97T XL	653	248	9.2	8 1/2J
	225/45R18	95T XL	659	225	9.2	7 1/2J
	245/45R18	100T XL	677	243	9.2	8J
	235/50R18	101T XL	693	245	9.2	7 1/2J
	215/55R18	95T	693	226	9.2	7J
	225/55R18	102T XL	705	233	9.2	7J
	235/55R18	100T	715	245	9.2	7 1/2J
	255/55R18	105T	737	265	9.2	8J
	225/60R18	104T XL	727	228	9.2	6 1/2J
	235/60R18	103T	739	240	9.2	7J
19	235/35R19	91T XL	647	241	9.2	7 1/2J
	255/45R19	104T XL	713	255	9.2	8J
	255/50R19	107T XL	739	265	9.2	8J
	265/50R19	110T XL	749	277	9.2	8 1/2J
	235/55R19	101T	741	245	9.2	7 1/2J
20	255/35R20	97T XL	686	260	9.2	9J
	315/35R20	110T XL	728	320	9.2	11J
	275/40R20	106T XL	728	278	9.2	9 1/2J



STUDLESS WINTER TIRE

WINTERPRO SW61

PERFORMANCE RATINGS:

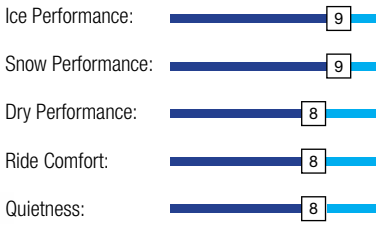


Performance Comparison



SW61 LAST GENERATION

Compound Stiffness

Applying a new generation tire formula has optimized the rubber property in extremely low temperatures. Compared with the previous generation, the new formula has maintain wear resistance while enhancing tyre performance in winter weather.

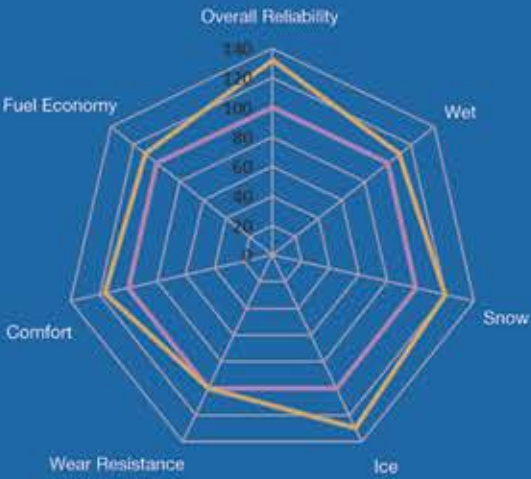

Test Conditions	Recipe	Last Generation	SW61
-40°C		65	55
-20°C		63	54
-10°C		62	53
0°C		61	52
10°C		61	51
20°C		58	51

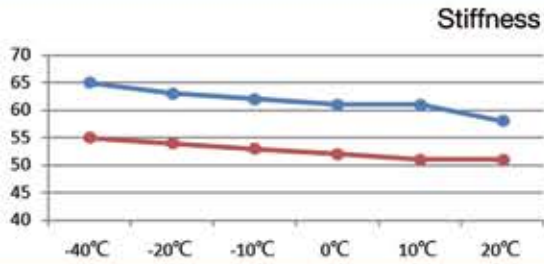

Asymmetric Pattern

Inside Tread:

The Z-shaped cross pattern increases the tire footprint and improves road surface adhesion . The larger number of horizontal sipes increases grip to improve braking on ice and snow.


Outside Tread:

The increased number of crossing grooves and sipes effectively pack and discharge snow to maintain grip on snow and ice will improve braking and driving capabilities.



3D Circumferential Grooves

In addition to drainage performance of the main grooves, the micro-ribs located inside the grooves and diamond-shaped notches crush incoming snow and water so as to generate more friction. This helps discharge the snow and water more effectively for improved overall braking and driving performance.



3D Interlocking Sipes

The tread blocks are separated into a dense group of fine sipes which improve tire traction on snow and ice. The base of the sipes are interlocked to enhances block stiffness which ensures greater buckling resistant and improves driving performance on wet and dry roads.



Serrated Grooves

The micro grooves subdue sound waves which effectively reduce noise emissions. The grooves are also capable of discharging broken-up ice and snow to improve traction.

	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
14	175/70R14	88T XL	602	177	8.7	5J
	185/70R14	88H	616	189	8.7	5 1/2J
15	195/55R15	85H	595	201	8.7	6J
	185/60R15	88H XL	603	189	8.7	5 1/2J
	195/60R15	88T	615	201	8.7	6J
	185/65R15	88T	621	189	8.7	5 1/2J
	195/65R15	91T	635	201	8.7	6J
	205/65R15	94H	647	209	9	6J
	205/70R15	96T	669	209	9	6J
16	205/55R16	94H XL	632	214	9	6 1/2J
	215/55R16	97H XL	642	226	9	7J
	225/55R16	99H XL	654	233	9	7J
	205/60R16	96H XL	652	209	9	6J
	215/60R16	99H XL	664	221	9	6 1/2J
17	215/45R17	87H	626	213	9	7J
	225/45R17	91H	634	225	9	7 1/2J
	235/45R17	94H	644	236	9	8J
	215/50R17	91T	648	226	9	7J
	225/50R17	98H XL	658	233	9	7J
	215/55R17	94H	668	226	9	7J
	225/55R17	97H	680	233	9	7J
18	225/45R18	95H XL	659	225	9	7 1/2J
	235/45R18	98H XL	669	236	9	8J
	245/45R18	100H XL	677	243	9	8J



ULTRA HIGH PERFORMANCE TIRE



ATREZZO RUN-FLAT

ATREZZO RUN-FLAT


Run-flat tires (RFT), also known as “self-supporting run-flat tires,” are an important safety feature for any vehicle. A Run-flat tire is built with a thicker sidewall to help support the tire shape after losing air. This allows the tire to continue to run safely, but at a limited speed and mileage. When normal tires are punctured, they can instantly lead to a severe sidewall collapse; in the event of a collapse, the vehicle loses its only support which can cause the vehicle's center of gravity to change instantaneously. RFT helps to lessen the severity of a flat tire and allows you to get to the closest destination safely.



PERFORMANCE RATINGS:

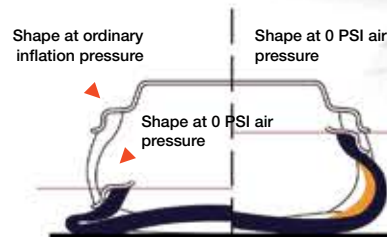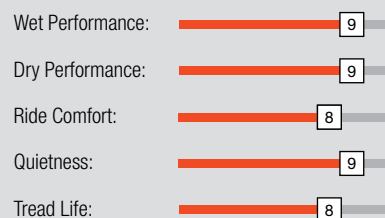

This is where run-flat tires come in; after the tire begins leaking air, the sidewall maintains its shape in order to continue to support the weight of the vehicle.

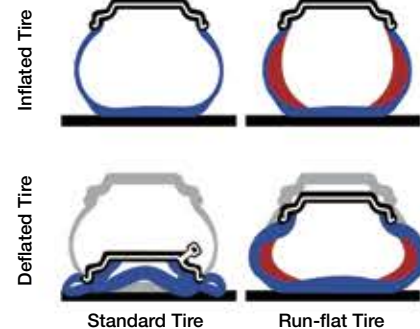

RFT Product Features:

1. Greater safety and the driver will not be delayed or stranded on remote highways because of a flat tire.
2. Avoid accidents caused by the loss of control from punctures or air leaks:
When the tire is flat, even if all the air pressure has leaked from the tire, the vehicle will continue to drive at normal speeds without having to be replaced immediately.
3. Even when your tire begins leaking air you can drive to your local tire dealer to have it repaired. RFT technology also means there is no need to carry a spare which helps increase storage space within the vehicle.


	Size	L.I. / S.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch	UTQG
16	195/55RF16	87V	620	201	8.2	6J	340/A/A
	205/55ZRF16	91W	632	214	8.3	6 1/2J	340/A/A
17	205/45RF17	84V	616	206	8.2	7J	340/A/A
	205/45RF17	88W XL	616	206	8.2	7J	340/A/A
	225/45ZRF17	91W/Y	634	225	8.2	7 1/2J	340/A/A
	205/50ZRF17	89W	638	214	8.2	6 1/2J	340/A/A
	225/50ZRF17	94W	658	233	8.2	7J	340/A/A
	225/55ZRF17	97Y	680	233	8.2	7J	340/A/A
18	255/35ZRF18	90Y	635	260	8.2	9J	340/A/A
	225/40ZRF18	92Y XL	637	230	8.2	8J	340/A/A
	245/40ZRF18	97Y XL	653	248	8.2	8 1/2J	340/A/A
	275/35ZRF19	96Y	675	278	8.2	9 1/2J	340/A/A
19	275/35ZRF19	100Y XL	675	278	8.2	9 1/2J	340/A/A
	245/40ZRF19	94Y	679	248	8.2	8 1/2J	340/A/A
	245/40ZRF19	98Y XL	679	248	8.2	8 1/2J	340/A/A

SPECIAL TRAILER TIRE

ECO HAULER ST



PERFORMANCE RATINGS:

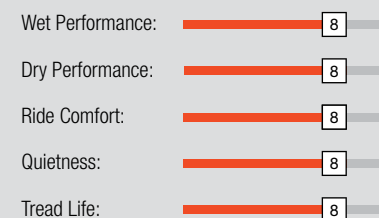

*Optimized formula and structural design
improve aging resistance.*



The slight angle of the main grooves effectively funnel water out of the tire to improve hydroplaning resistance.



The closed shoulder and horizontal groove design improve rigidity and reduce partial wear to extend tire life.

	Size	L.I. / S.R.	P.R.	O.D. mm	S.W. mm	T.D. mm	R.W. inch
13	ST175/80R13	91/87M	6PR	610	177	6.2	5J
	ST175/80R13	97/93M	8PR	610	177	6.2	5J
	ST185/80R13	94/89M	6PR	626	184	6.2	5J
	ST185/80R13	99/95M	8PR	626	184	6.2	5J
14	ST205/75R14	100/96M	6PR	664	203	6.2	5 1/2J
	ST205/75R14	105/101M	8PR	664	203	6.2	5 1/2J
	ST215/75R14	102/98M	6PR	678	216	6.2	6J
	ST215/75R14	108/103M	8PR	678	216	6.2	6J
	ST205/75R15	101/97M	6PR	689	203	6.2	5 1/2J
15	ST205/75R15	107/102M	8PR	689	203	6.2	5 1/2J
	ST225/75R15	113/108M	8PR	719	223	6.7	6J
	ST225/75R15	117/112M	10PR	719	223	6.7	6J
	ST235/80R16	124/120M	10PR	782	235	6.7	6 1/2J
16	ST235/80R16	127/122M	12PR	782	235	6.7	6 1/2J
	ST235/85R16	125/121M	10PR	806	235	6.7	6 1/2J
	ST235/85R16	128/124M	12PR	806	235	6.7	6 1/2J

Note



REV 1.18